

SOUND RETARDANT DOOR

Perforated Insulated Slat




HIGH PERFORMANCE Patent # 5419386 ®
Insul-Sound
 SOUND RETARDANT DOOR

Hand Chain Operated
 Between Jamb Mounted


Page#:

Page 1

LG - Left Guide
 RG - Right Guide
 B - Bracket
 GW - Guide Width
 GD - Guide Depth

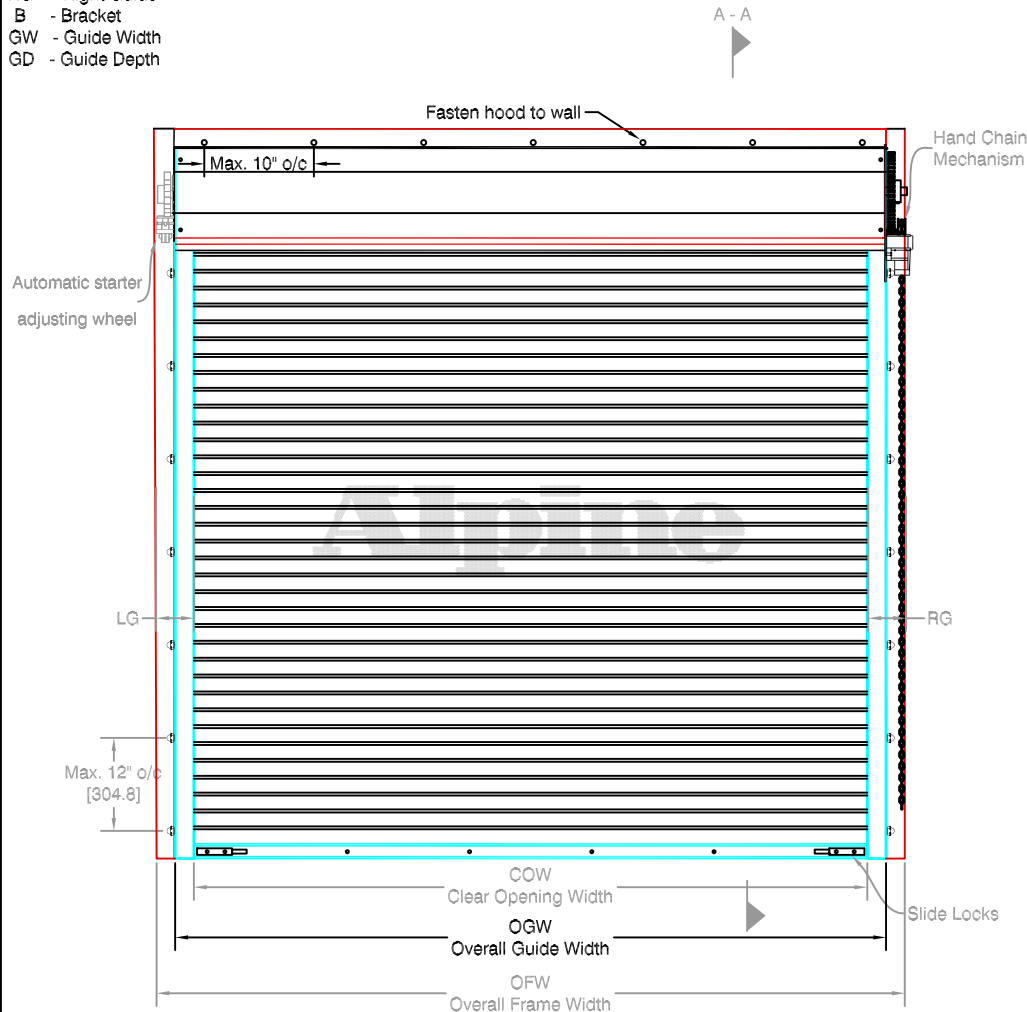


COIL SIDE ELEVATION

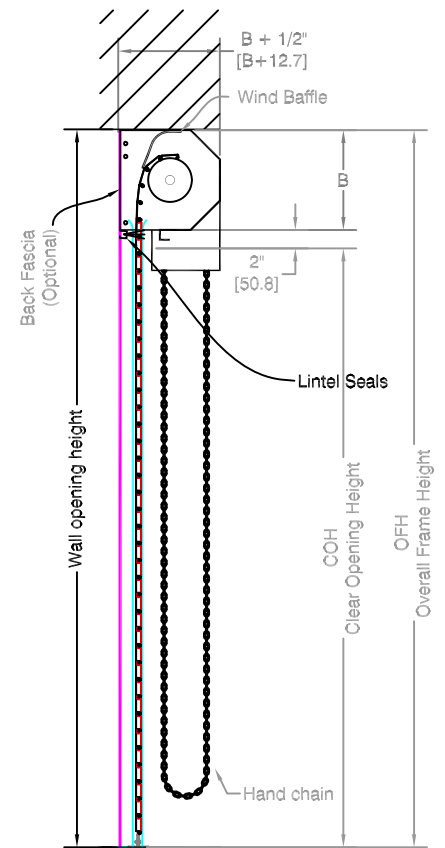


VERTICAL SECTION A - A


STEEL MOUNTED

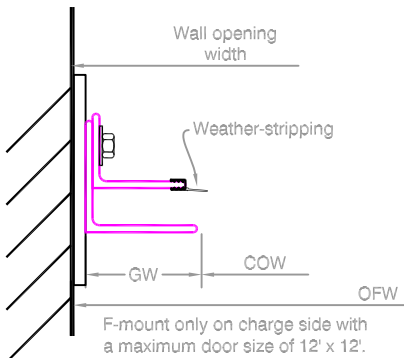

PACKOUT MOUNTED

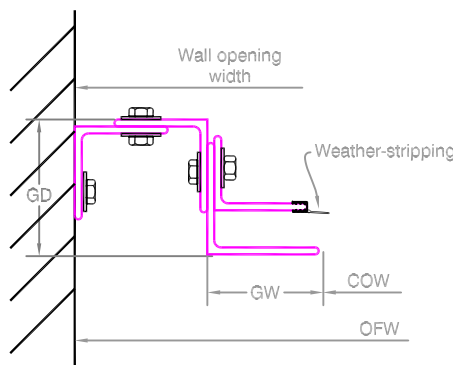

TUBE MOUNTED

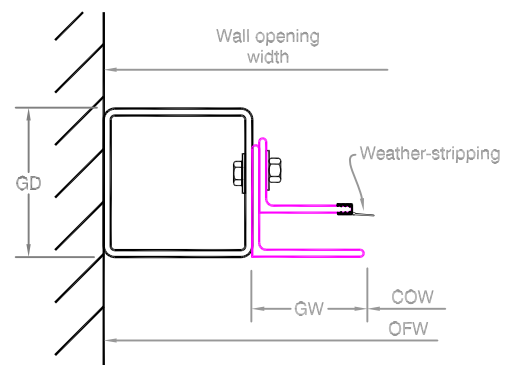

GUIDE SECTION B - B

SOUND RETARDANT DOOR

Perforated Insulated Slat


HIGH PERFORMANCE Patent # 5419386 ®

Insul-Sound


SOUND RETARDANT DOOR

Page#:


Page 2

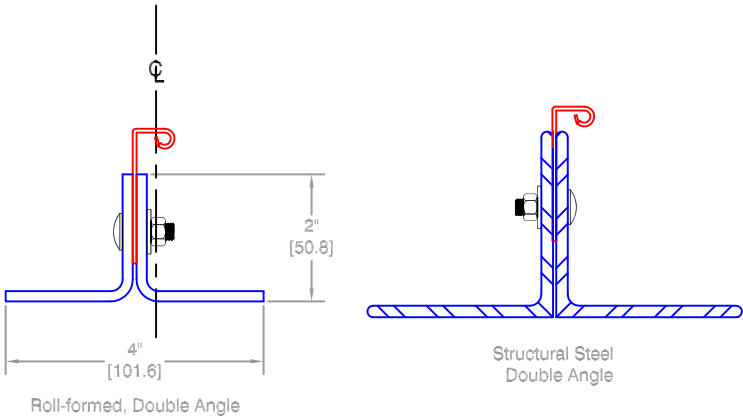


BOTTOM BAR DETAIL

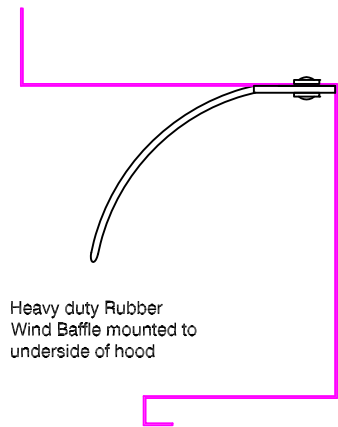


WIND BAFFLE DETAIL

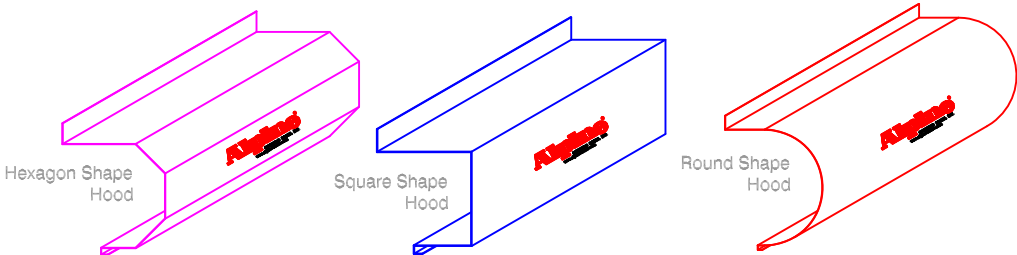


HOOD SHAPES AVAILABLE FOR THIS DOOR



GUIDE OPTIONS

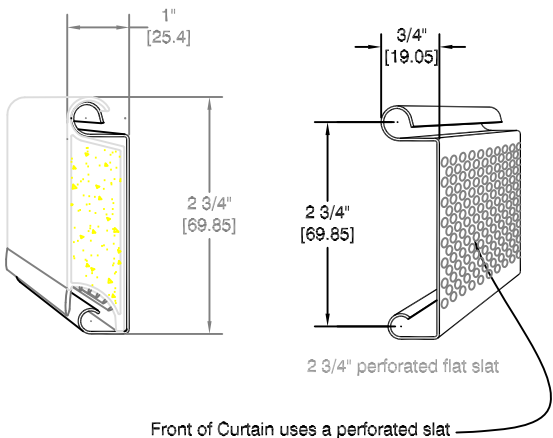

CURTAIN DETAIL



OBSTACLE EDGES AVAILABLE

Distributed By:

Call your Alpine representative for additional options and safty products to help find the best Alpine door to suit your needs.

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.
8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800
© COPYRIGHT MAY 2007


NOTE: MAXIMUM PIPE
DEFLECTION ON ANY SIZE
DOOR IS .034

HIGH PERFORMANCE Patent # 5419386 ®
Insul-Sound
SOUND RETARDANT DOOR

Page#:

Page 3

Finding the minimum required operation for the size door you need.

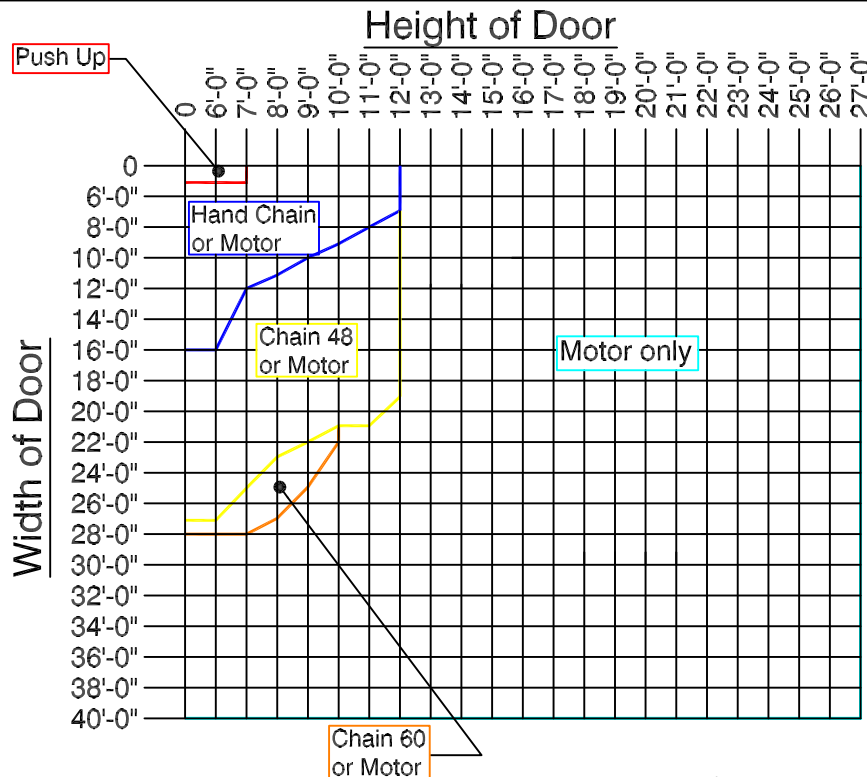


Operator Legend

- Manual Push Up Operation
- Hand Chain Operation
- Hand Chain w/ Gear reduced 48
- Hand Chain w/ Gear reduced 60
- Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

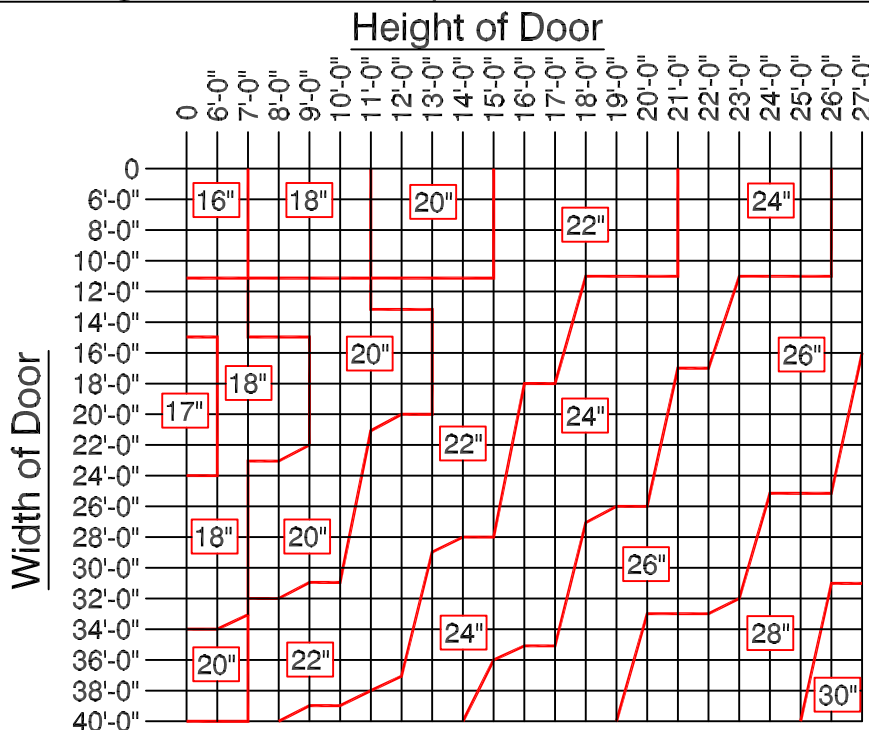

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find