SOUND RETARDANT DOOR

Perforated Insulated Slat









Hand Crank Operated Face of Wall Mounted

Page#: Page 1

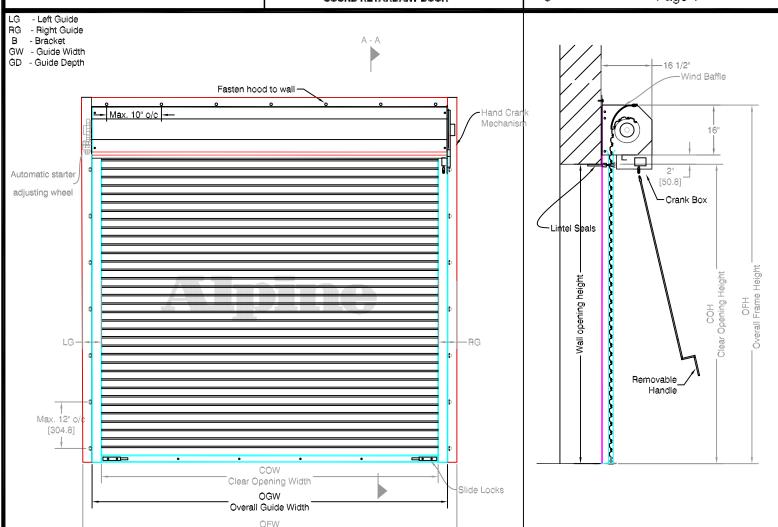

Overall Frame Width COIL SIDE ELEVATION

VERTICAL SECTION A - A

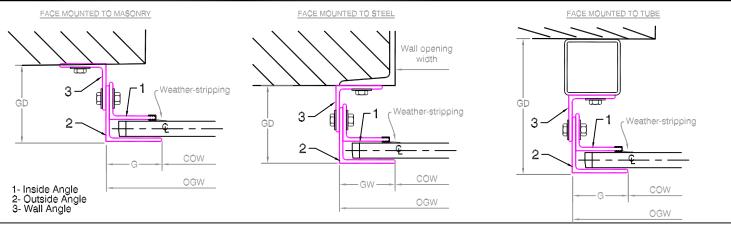

GUIDE SECTION B - B

Notes:

- 1. See page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

SALES REP:	
CUSTOMER:	
JOB NAME:	
NUMBER:	



© COPYRIGHT JANUARY 2001

SOUND RETARDANT DOOR Perforated Insulated Slat HIGH PERFORMANCE Patent # 5419386 (R) Page#: Page 2 SOUND RETARDANT DOOR [50.8] Heavy duty Rubber Wind Baffle mounted to underside of hood Structural Steel [101.6] Double Angle Roll-formed, Double Angle **BOTTOM BAR DETAIL** WIND BAFFLE DETAIL Round Shape Hexagon Shape Square Shape Hood Structural Roll-Formed Angles Guide Angles Guide GUIDE OPTIONS HOOD SHAPES AVAILABLE FOR THIS DOOR [25.4] 2 3/4" 2 3/4" [69.85] [69.85] Neoprene Astragal 2 3/4" perforated flat slat Front of Curtain uses a perforated slat **OBSTACLE EDGES AVAILABLE CURTAIN DETAIL** Manufactured by: Distributed By: Call your Alpine representative for additional options and safty products to help find the best. Alpine door to suit your

needs.

OVERHEAD DOORS, INC

8 HULSE ROAD EAST SETAUKET, N.Y. 11733 TEL: (631)473-9300 FAX: (631)642-0800 © COPYRIGHT MAY 2007


Perforated Insulated Slat

NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE DOOR IS .034 HIGH PERFORMANCE Patent # 5419386 ®

SOUND RETARDANT DOOR

Page#: Page 3

Finding the minimum required operation for the size door you need.

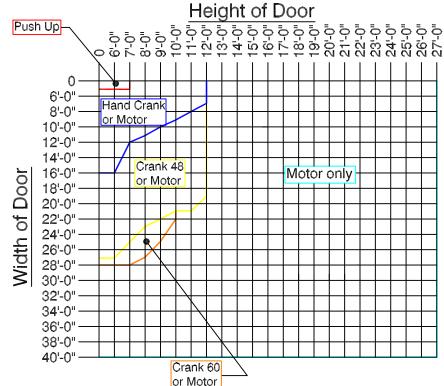

Operator Legend

Manual Push Up Operation

Hand Crank Operation

Hand Crank w/ Gear reduced 48

Hand Crank w/ Gear reduced 60

Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.


For example: The blue line indicates a Hand Crank Operation. Any size door on that line or above that line may use a Hand Crank, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

26"

28"

30'

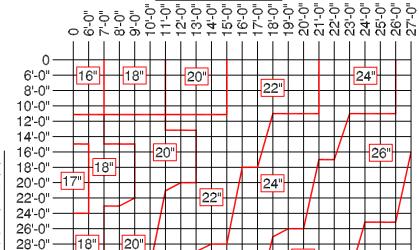

24"

22"

20"

Height of Door

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

30'-0"

32'-0"

34'-0"

36'-0"

38'-0"

40'-0"

