STEEL & PVC INSULATED DOOR

2 3/4" Flat Slat









Hand Chain Operated Between Jamb Mounted


Page#: Page 1

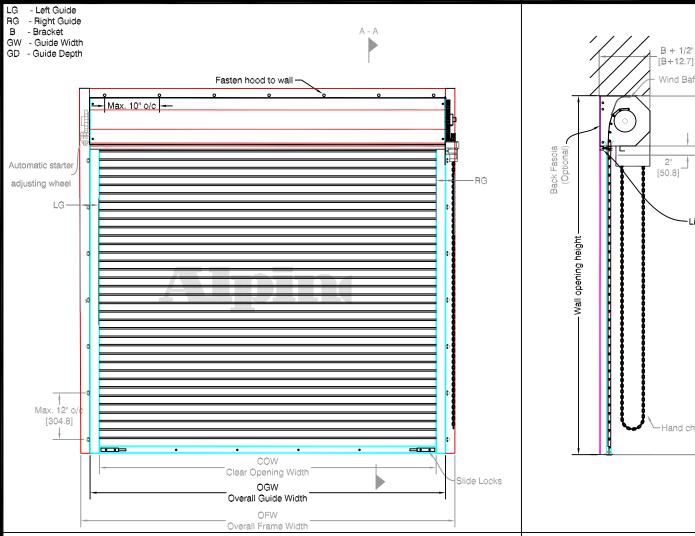

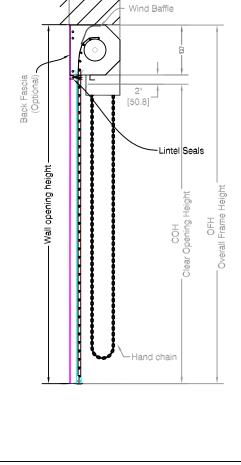

COIL SIDE ELEVATION

VERTICAL SECTION A - A

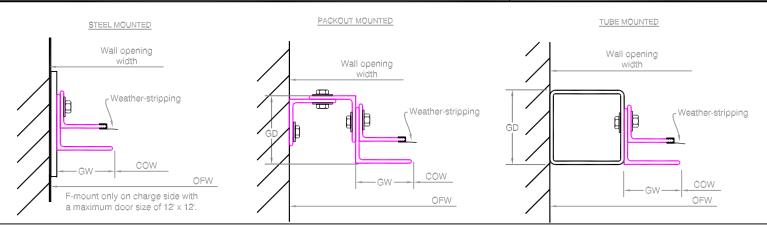


GUIDE SECTION B - B

Notes:

- 1. See page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

CUSTOMER: JOB NAME: NUMBER:



STEEL & PVC INSULATED DOOR 2 3/4" Flat Slat Hand Chain Operated Between Jamb Mounted STEEL & PVC INSULATED DOOR Page#: Page 2 [50.8] Heavy duty Rubber Wind Baffle mounted to underside of hood Structural Steel [101.6] Double Angle Roll-formed, Double Angle **BOTTOM BAR DETAIL** WIND BAFFLE DETAIL Round Shape Hexagon Shape Square Shape Hood Structural Roll-Formed Angles Guide Angles Guide HOOD SHAPES AVAILABLE FOR THIS DOOR **GUIDE OPTIONS** [25.4] 2 3/4 [69.85] Neoprene Astragal **OBSTACLE EDGES AVAILABLE CURTAIN DETAIL** Distributed By: Manufactured by: Call your Alpine representative for additional options and

OVERHEAD DOORS, INC

8 HULSE ROAD EAST SETAUKET, N.Y. 11733 TEL: (631)473-9300 FAX: (631)642-0800 © COPYRIGHT MAY 2007

safty products to help find the best. Alpine door to suit your


needs.

NOTE: MAXIMUM PIPE **DEFLECTION ON ANY SIZE DOOR IS .034**



Page#: Page 3

Finding the minimum required operation for the size door you need.

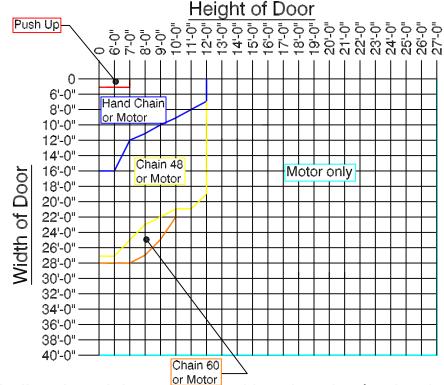


Operator Legend

Manual Push Up Operation Hand Chain Operation Hand Chain w/ Gear reduced 48 Hand Chain w/ Gear reduced 60 Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

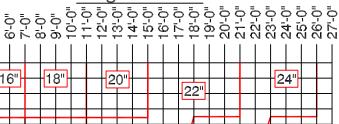

Height of Door

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

6'-0" 16" 8'-0" 10'-0" 12'-0" 14'-0" 16'-0" 20" 26" 18" 18'-0" -20'-0" - 17' 24" 22'-0" -22" 24'-0" -26'-0" 18" 20" 28'-0" 26" 30'-0" 32'-0" 34'-0" 24" 28" 22" 36'-0" 20" 38'-0" 30' 40'-0"

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

