STEEL & PVC INSULATED DOOR


2 3/4" Flat Slat








Motor Operated Between Jamb Mounted

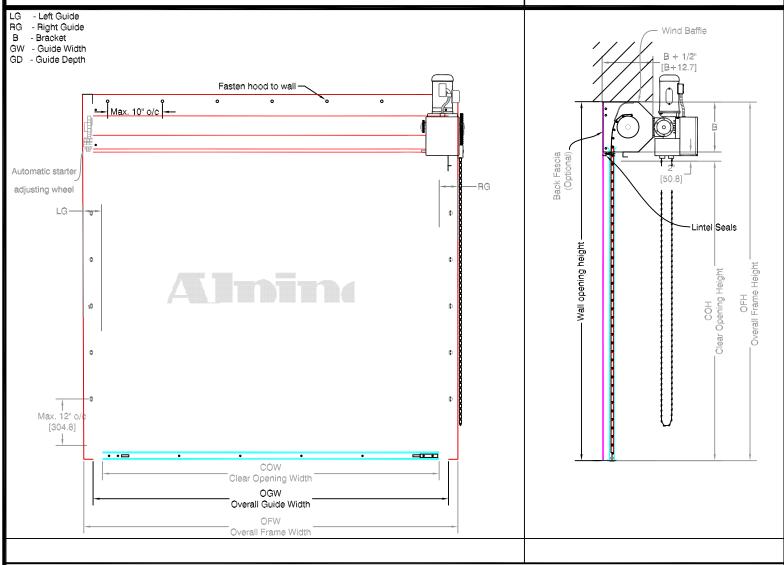

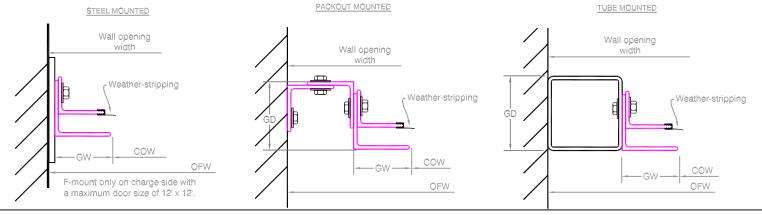

GUIDE SECTION B - B

SALES REP:	Manufacture
CUSTOMER:	
	8 HUI
NUMBER:	TE

Wanufactured by:

OVERHEAD DOORS, INC:

8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007

STEEL & PVC INSULATED DOOR 2 3/4" Flat Slat **Motor Operated** Between Jamb Mounted STEEL & PVC INSULATED DOOR Page#: Page 2 [50.8] Heavy duty Rubber Wind Baffle mounted to underside of hood Structural Steel [101.6] Double Angle Roll-formed, Double Angle **BOTTOM BAR DETAIL** WIND BAFFLE DETAIL Round Shape Hexagon Shape Square Shape Hood Structural Roll-Formed Angles Guide Angles Guide HOOD SHAPES AVAILABLE FOR THIS DOOR **GUIDE OPTIONS** [25.4] 2 3/4 Pneumatic [69.85] Sensing Edge Neoprene Astragal Sensing Edge

Distributed By:

CURTAIN DETAIL

Call your Alpine representative for additional options and safty products to help find the best. Alpine door to suit your needs.

OBSTACLE EDGES AVAILABLE




2 3/4" Flat Slat

NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE DOOR IS .034

INSUI-VAPOR
STEEL & PVC INSULATED DOOR

Page#: Page 3

Finding the minimum required operation for the size door you need.

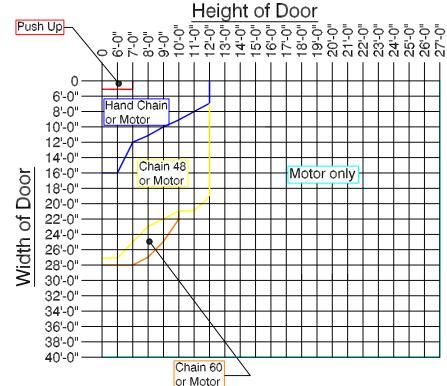

Operator Legend

Manual Push Up Operation

Hand Chain Operation

Hand Chain w/ Gear reduced 48


Hand Chain w/ Gear reduced 60

Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

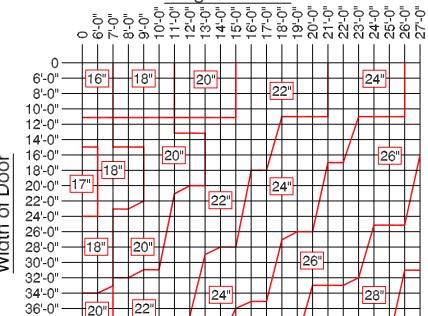

Height of Door

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

30'

Distributed By:

38'-0"

40'-0"

