

Mall & Storefront Security Doors

2 3/4" Perforated Flat Slat




Alumavision[™]
ALUMINUM PERFORATED ROLLING DOOR

Hand Crank Operated
Face Mounted to Wall


Page#:

Page 1



LG - Left Guide
RG - Right Guide
B - Bracket
GW - Guide Width
GD - Guide Depth

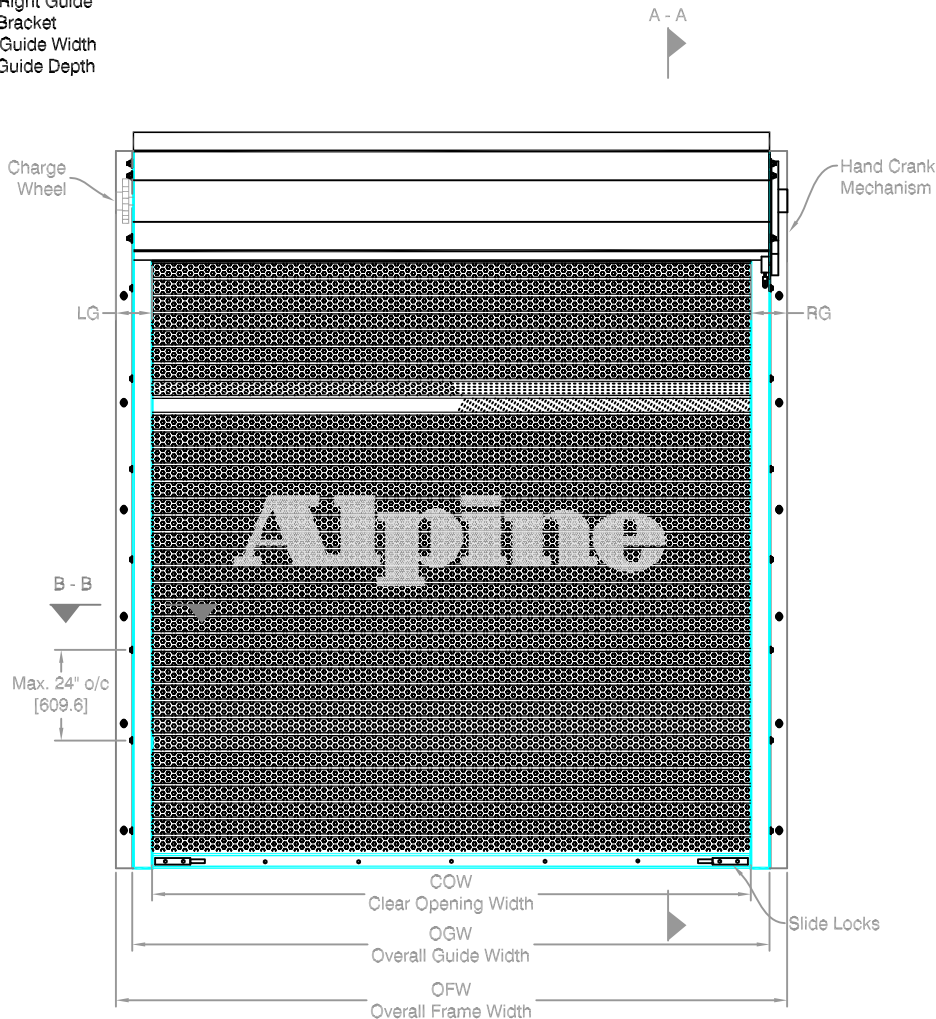


COIL SIDE ELEVATION

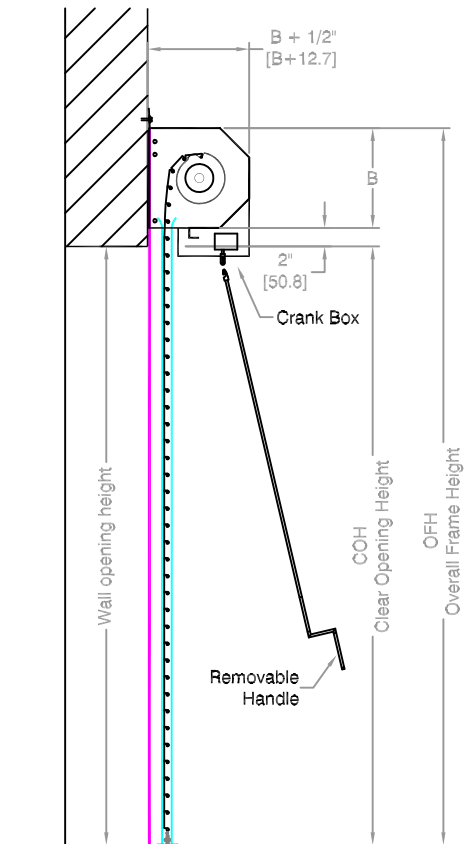

VERTICAL SECTION A - A

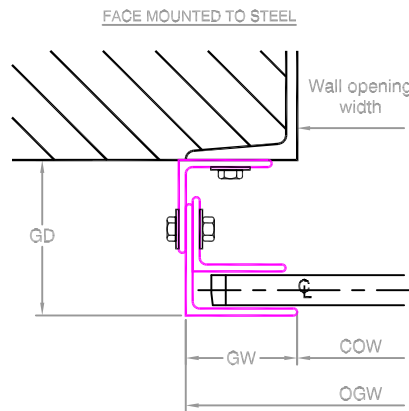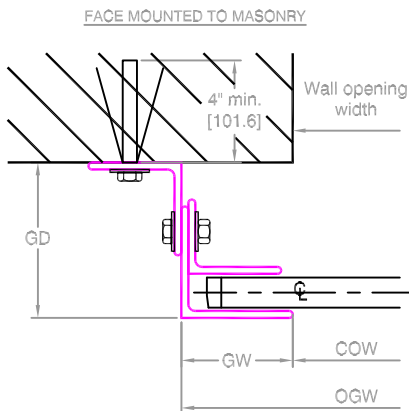

GUIDE SECTION B - B



SLAT OPTIONS

CURTAIN DETAIL

Notes:

- See page 2 for more options.
- All metric conversions of dimensions are shown in brackets [].

SALES REP:

CUSTOMER:

JOB NAME:

NUMBER:

Manufactured by:

Alpine[®]
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2009


Alumavisiontm

ALUMINUM PERFORATED ROLLING DOOR


Hand Crank Operated
Face Mounted to Wall

Page#:


Page 2

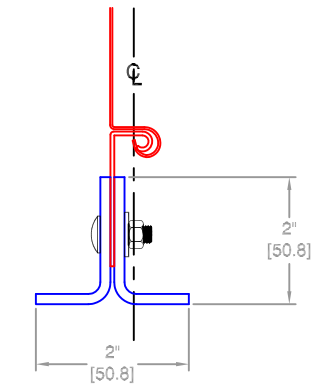

Roll-formed, Double Angle



Single Angle

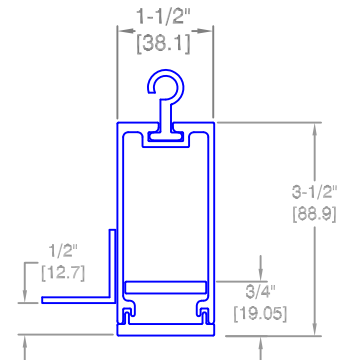


Aluminum extruded Tubular Bar

BOTTOM BAR OPTIONS AVAILABLE FOR THIS DOOR




Neoprene Astragal


Guides available for
the 2-3/4" slat



Structural
Angles Guide



Roll-Formed
Angles Guide




Roll-Formed
Guide


OPTIONAL EDGES AVAILABLE

GUIDES AVAILABLE FOR THIS DOOR


Hoods available for
the 2-3/4" slat

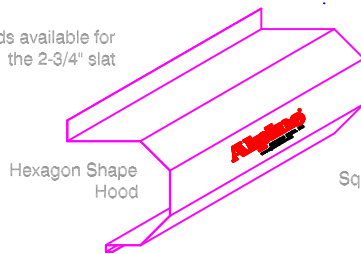

Hexagon Shape
Hood



Square Shape
Hood



Round Shape
Hood

HOOD SHAPES AVAILABLE FOR THIS DOOR

Distributed By:

Call your Alpine representative for additional options and safety products to help find the best Alpine door to suit your needs.

Manufactured by:

Alpine[®]

OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2009


NOTE: MAXIMUM PIPE
DEFLECTION ON ANY SIZE
DOOR IS .034



Page#:

Page 3

Finding the minimum required operation for the size door you need.

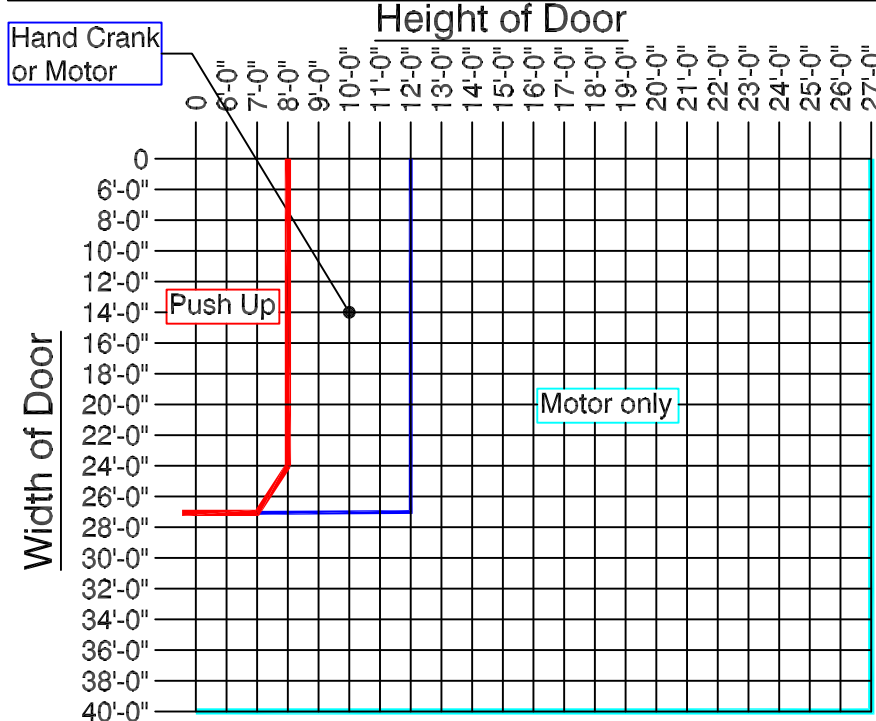


Operator Legend

- Manual Push Up Operation
- Hand Crank Operation
- Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.
For example: The blue line indicates a Hand Crank Operation. Any size door on that line or above that line may use a Hand Crank, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum "B" bracket size for the door you need.

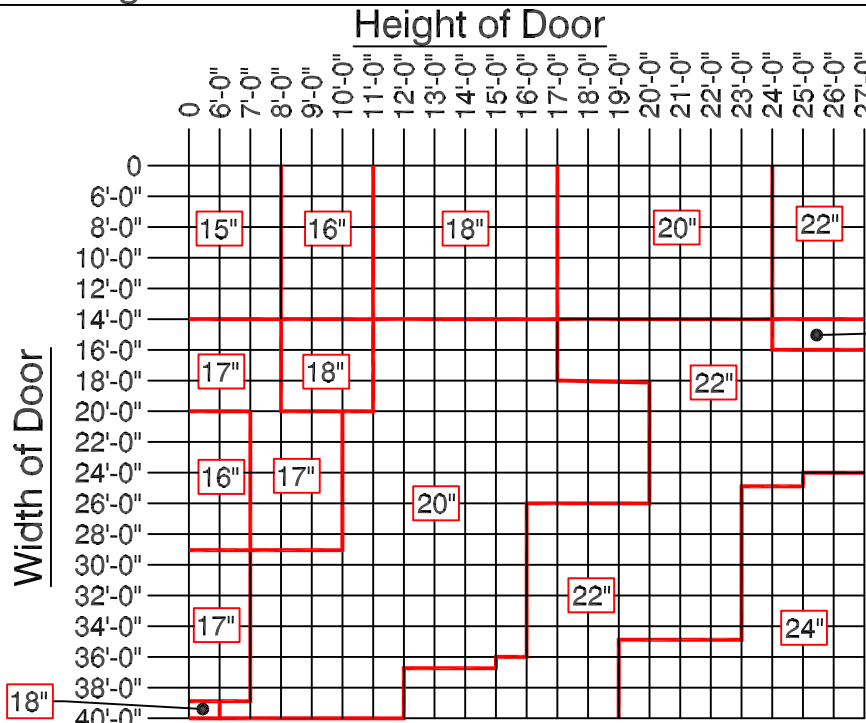

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

Manufactured by:

Alpine[®]
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2009