FIRE DOOR









Manual Push-up Operated Face of Wall Mounted

Page#: Page 1

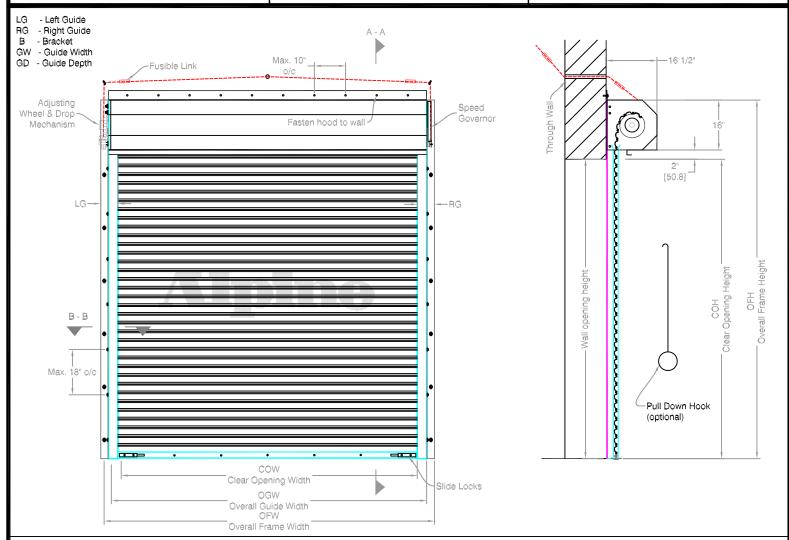

COIL SIDE ELEVATION

VERTICAL SECTION A - A

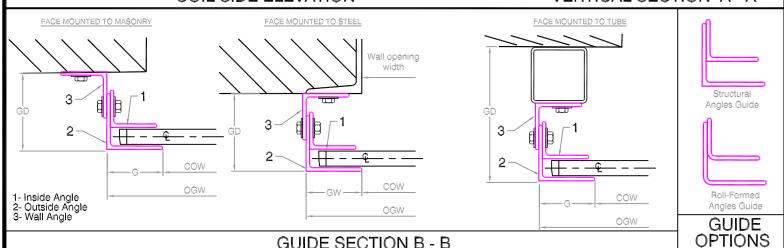

GUIDE SECTION B - B

Notes:

- 1. See Page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

CUSTOMER: JOB NAME: NUMBER:



8 HULSE ROAD EAST SETAUKET, N.Y. 11733 TEL: (631)473-9300 FAX: (631)642-0800 © COPYRIGHT FEB. 2005


FIRE DOOR




Manual Push-up Operated Face of Wall Mounted

Page#:


Page 2

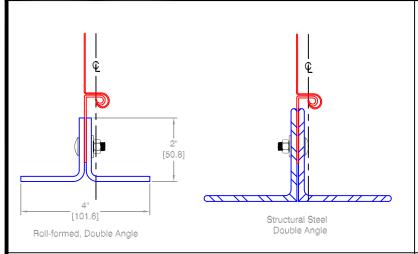

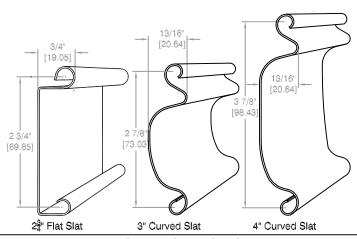


BOTTOM BAR DETAIL

SLAT OPTIONS

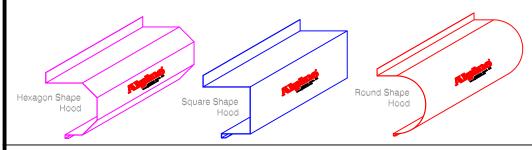


HOOD SHAPES AVAILABLE FOR THIS DOOR

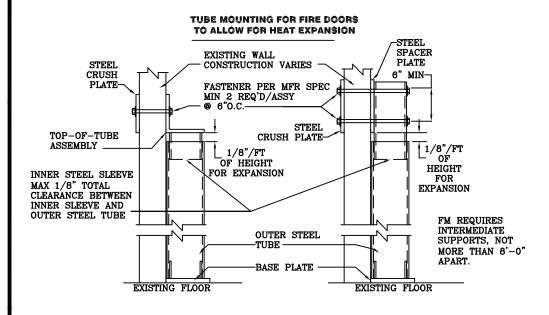

Distributed By:

Call your Alpine representative for additional options and safty products to help find the best. Alpine door to suit your needs.



Fire Rated Door


2 3/4" Flat Slat

NOTE: MAXIMUM PIPE **DEFLECTION ON ANY SIZE DOOR IS .034**

U.L. & NYC MEA APPROVED Page#: Page 3

Finding the minimum required operation for the size door you need.

Height of Door

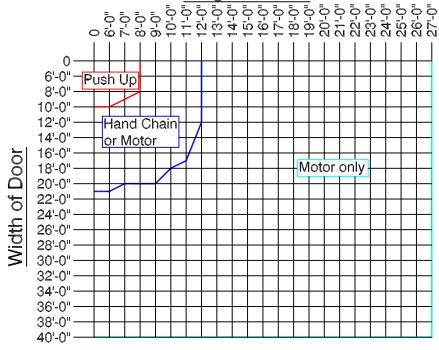

Operator Legend

Manual Push Up Operation

Hand Chain Operation


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Door

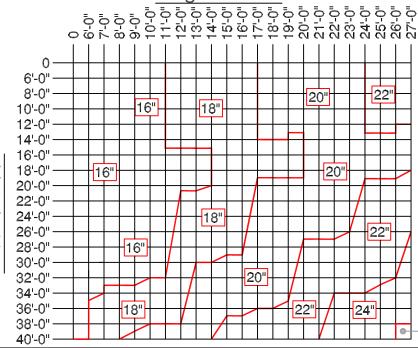


NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

26"

Distributed By:

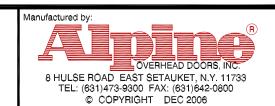

Fire Rated Door

3" Curved Slat


NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE


DOOR IS .034



Page#: Page 3

Finding the minimum required operation for the size door you need.



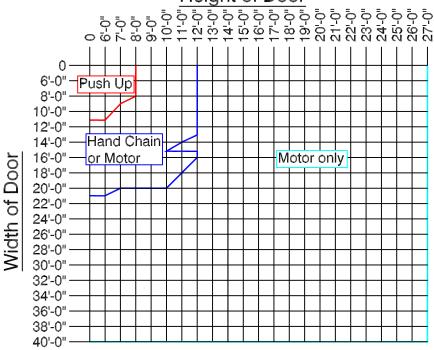

Operator Legend

Manual Push Up OperationHand Chain Operation


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Door

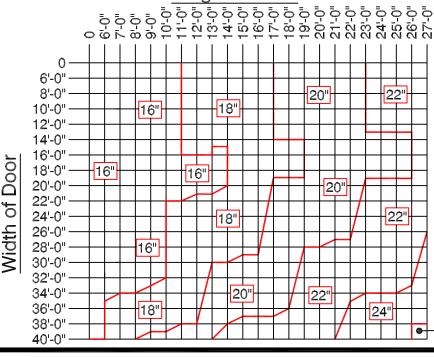

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

-24"

Distributed By:

Manufactured by:

OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT DEC 2006

Fire Rated Door

4" Curved Slat


NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE


DOOR IS .034



Page#: Page 3

Finding the minimum required operation for the size door you need.



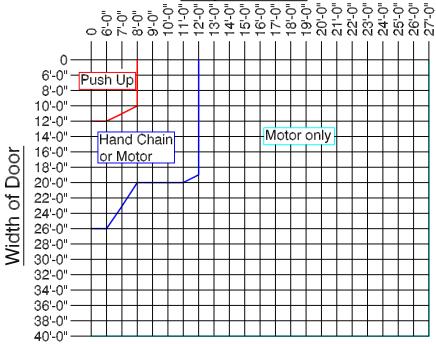

Operator Legend


Manual Push Up OperationHand Chain OperationMotor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Door

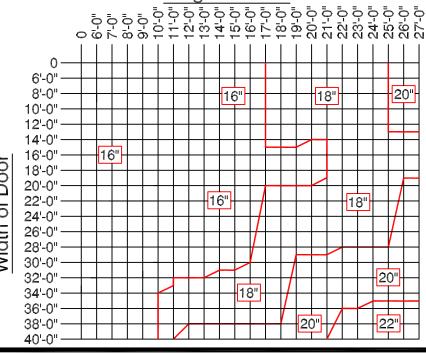

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

Manufactured by:

OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT DEC 2006