SMOKE FIRE TITE DOOR AMPORTANT



ALL GAPS, EDGES AND SEAMS MUST BE SEALED AROUND THE FULL PERIMETER OF THE DOOR WITH DOW RTV SILICONE 723 OR EQUAL.









Hand Chain Operated Between Jamb Mounted

Page#: Page 1

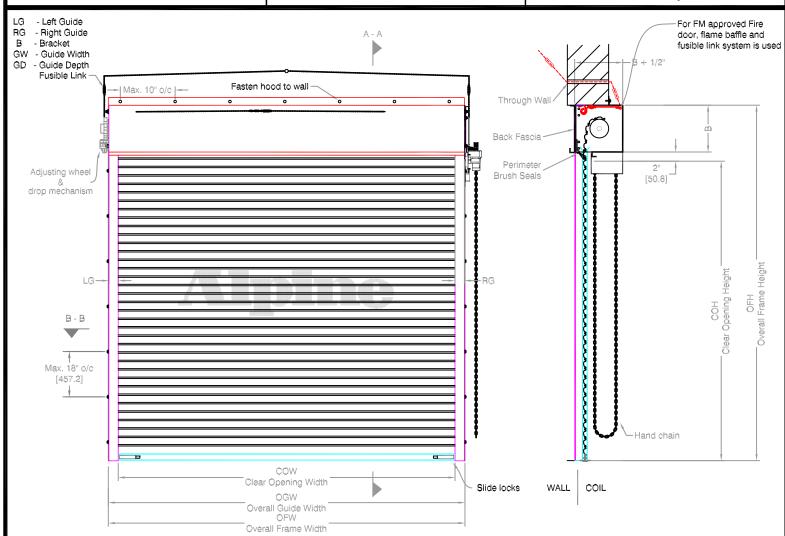


COIL SIDE ELEVATION

VERTICAL SECTION A - A







GUIDE SECTION B - B

FASTENER DETAIL

SLAT DETAIL

Notes:

- 1. See Page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

SALES REP:		
CUSTOMER:		
JOB NAME:		
NUMBER:		

Manufactured by: OVERHEAD DOORS, INC 8 HULSE ROAD EAST SETAUKET, N.Y. 11733 TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT JAN 2007

SMOKE FIRE TITE DOOR


2 3/4" Flat Slat




Hand Chain Operated Between Jamb Mounted

Page#:


Page 2

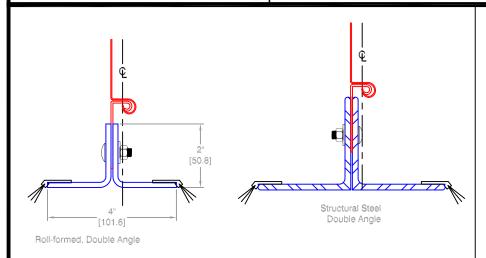




BOTTOM BAR DETAIL

GUIDE OPTIONS

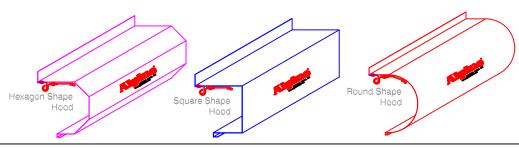


HOOD SHAPES AVAILABLE FOR THIS DOOR



FLAME BAFFLE DETAIL

Distributed By:

Call your Alpine representative for additional options and safty products to help find the best. Alpine door to suit your needs.



Fire Rated Door

DEFLECTION ON ANY SIZE

NOTE: MAXIMUM PIPE

DOOR IS .034






2 3/4" Flat Slat

Finding the minimum required operation for the size door you need.

Height of Door

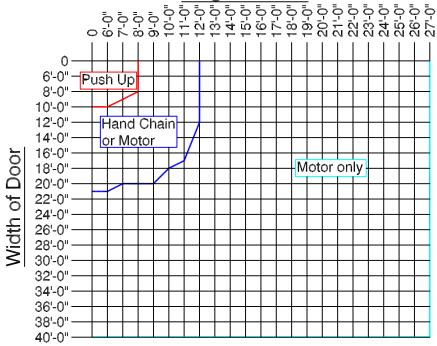

Operator Legend

Manual Push Up Operation

Hand Chain Operation


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Door

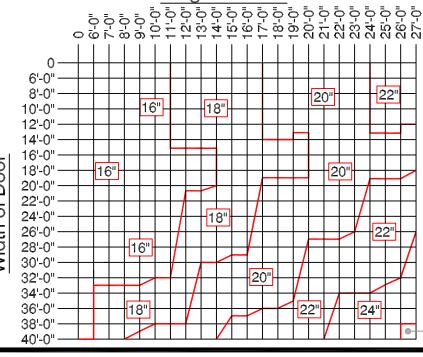

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

26"

Distributed By:

