Counter-Shutter Fire Door








Manual Push-up Operated Between Jamb Mounted


Page#: Page 1

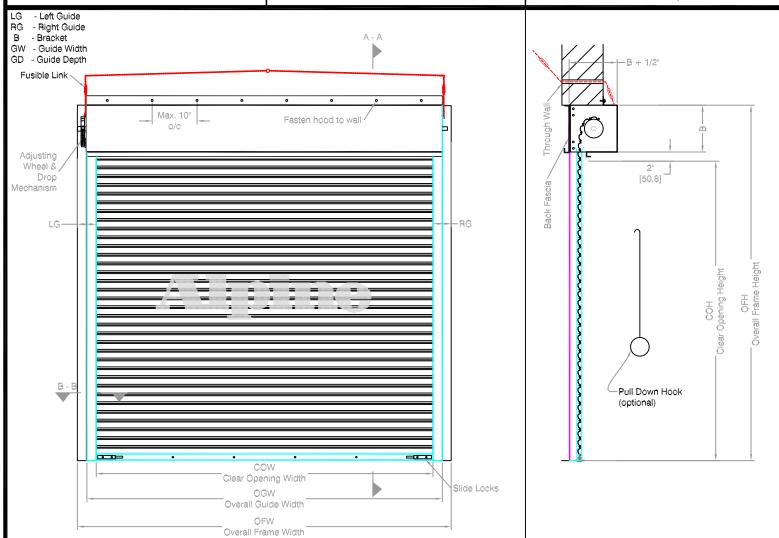


COIL SIDE ELEVATION

VERTICAL SECTION A - A

9/16" [14.29]





SLAT OPTIONS

GUIDE SECTION B - B

CURTAIN DETAIL

Notes:

- 1. See page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

SALES REP:
CUSTOMER:
IOB NAME:
NUMBER:
NUMBER:

Manufactured by:

OVERHEAD DOORS, INC:

8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007


Counter-Shutter Fire Door




Manual Push-up Operated Between Jamb Mounted

Page#:


Page 2



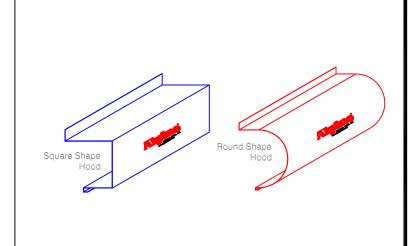


BOTTOM BAR OPTIONS

HOOD SHAPES AVAILABLE FOR THIS DOOR



GUIDE DETAIL

TUBE MOUNTING FOR FIRE DOORS TO ALLOW FOR HEAT EXPANSION



Distributed By:

Call your Alpine representative for additional options and safety products to help find the best. Alpine door to suit your needs.



1 1/4" Baby Flat Slat


NOTE: MAXIMUM PIPE **DEFLECTION ON ANY SIZE DOOR IS .034**



Page#: Page 3

Finding the minimum required operation for the size door you need.

Height of Shutter

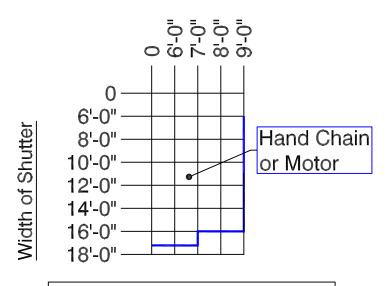

FOR LARGER SIZES CONSULT FACTORY.

Operator Legend

- Hand Chain Operation


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Shutter




FOR LARGER SIZES CONSULT FACTORY.

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:




NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE DOOR IS .034



Page#: Page 3

Finding the minimum required operation for the size door you need.

Height of Shutter



FOR LARGER SIZES CONSULT FACTORY.

Operator Legend

Manual Push Up Operation

—— Hand Crank Operation


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Crank Operation. Any size door on that line or above that line may use a Hand Crank, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

Height of Shutter



FOR LARGER SIZES CONSULT FACTORY.

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

