## QUALITY ROLLING GRILLE DOORS

# Straight or Brick Pattern









Hand Crank Operated Between Jamb Mounted


Page#: Page 1

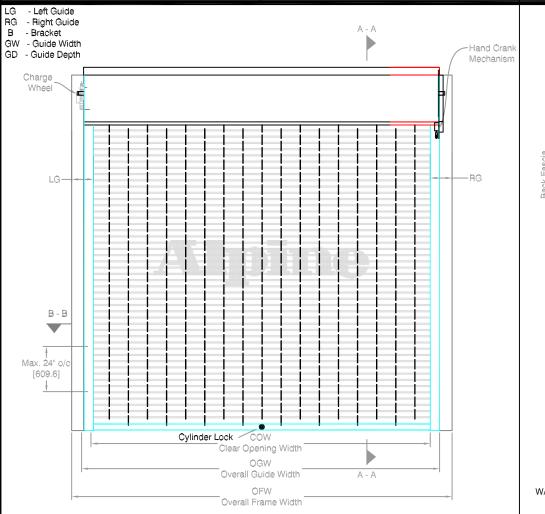


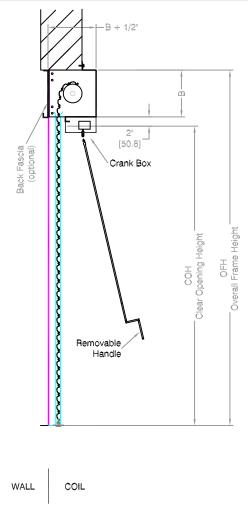


### **COIL SIDE ELEVATION**

### **VERTICAL SECTION A - A**







### **GUIDE SECTION B - B**

#### Notes:

- 1. See page 2 for more options.
- 2. All metric conversions of dimensions are shown in brackets [].

SALES REP:
CUSTOMER:
JOB NAME:
NUMBER:



## QUALITY ROLLING GRILLE DOORS


# Straight or Brick Pattern





Hand Crank Operated Between Jamb Mounted

Page 2

Page#:











Neoprene Astragal

**CURTAIN OPTIONS** 

### **OBSTACLE EDGES AVAILABLE**

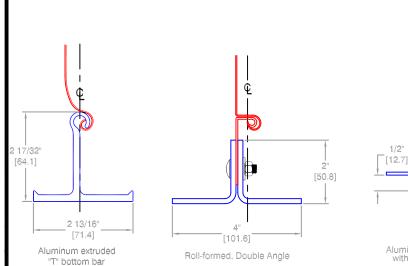


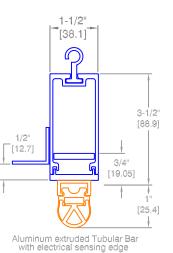



**BOTTOM BAR OPTIONS** 

### **GUIDE DETAIL**

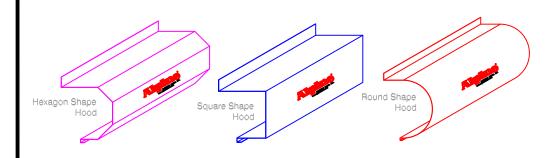

### **HOOD SHAPE OPTIONS**

#### Distributed By:

Call your Alpine representative for additional options and safty products to help find the best. Alpine door to suit your needs.




NOTE: MAXIMUM PIPE DEFLECTION ON ANY SIZE DOOR IS .034

BOLLING GRILLE DOOR

Page#: Page 3

Finding the minimum required operation for the size door you need.

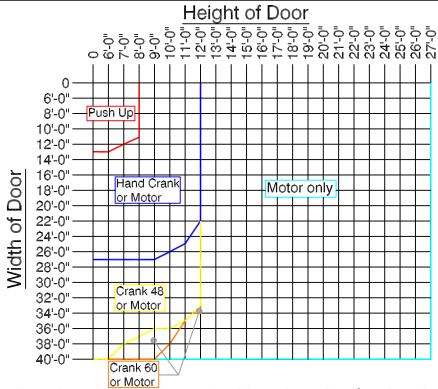

### Operator Legend


Manual Push Up Operation
Hand Crank Operation
Hand Crank w/ Gear reduced 48
Hand Crank w/ Gear reduced 60


Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Crank Operation. Any size door on that line or above that line may use a Hand Crank, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.



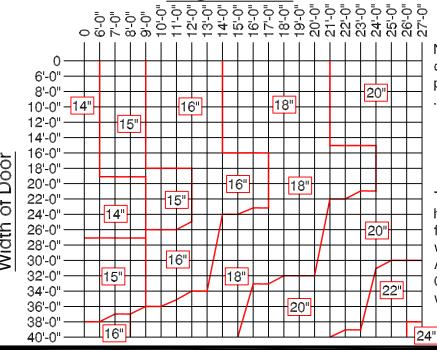

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

