

# QUALITY ROLLING GRILLE DOORS

Straight or Brick Pattern




Motor Operated  
Between Jamb Mounted


Page#:

Page 1

LG - Left Guide  
RG - Right Guide  
B - Bracket  
GW - Guide Width  
GD - Guide Depth

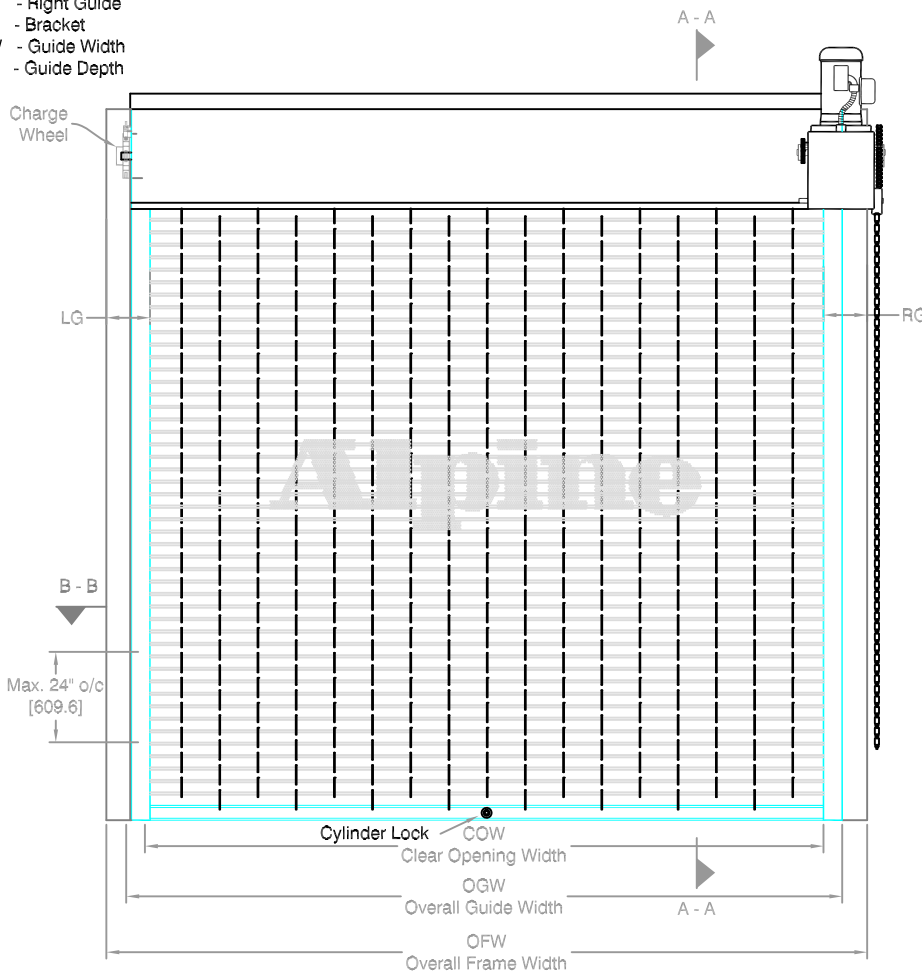


COIL SIDE ELEVATION

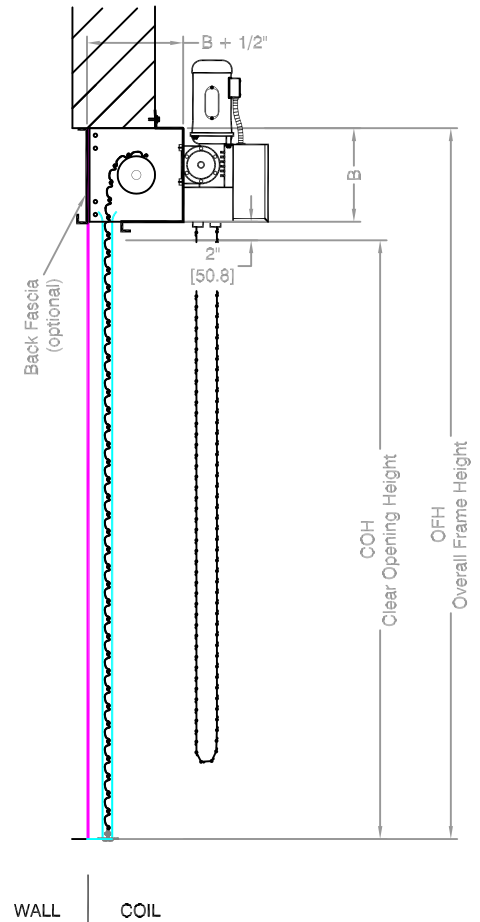


VERTICAL SECTION A - A


GUIDE MOUNTED  
TO JAMB

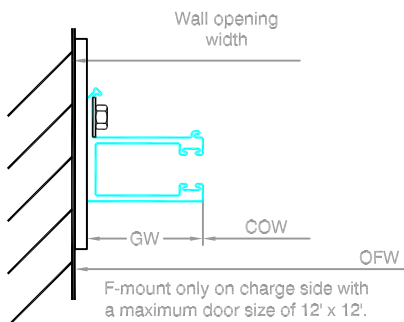

PACKOUT MOUNTED

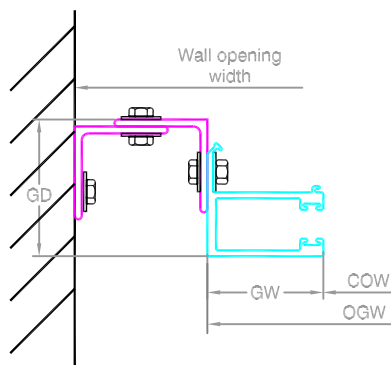

TUBE MOUNTED

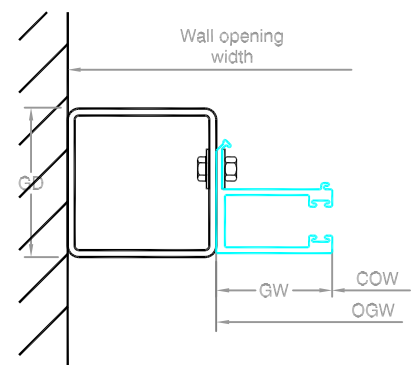

GUIDE SECTION B - B

## Notes:

- See page 2 for more options.
- All metric conversions of dimensions are shown in brackets [ ].

SALES REP:

CUSTOMER:

JOB NAME:

NUMBER:

Manufactured by:



8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT JAN 2007

# QUALITY ROLLING GRILLE DOORS

Straight or Brick Pattern




Motor Operated  
Between Jamb Mounted

Page#:


Page 2

4 1/2", 6" or 9" Wide



Straight Pattern

4 1/2" or 6" Wide



Brick Pattern



Neoprene Astragal




Pneumatic  
Sensing Edge




Electric  
Sensing Edge

CURTAIN OPTIONS


OBSTACLE EDGES AVAILABLE

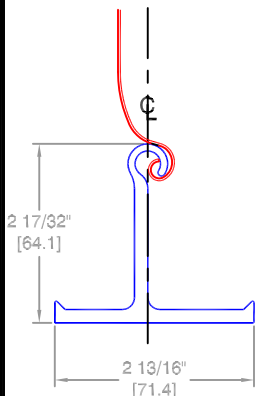


Aluminum extruded  
"T" bottom bar

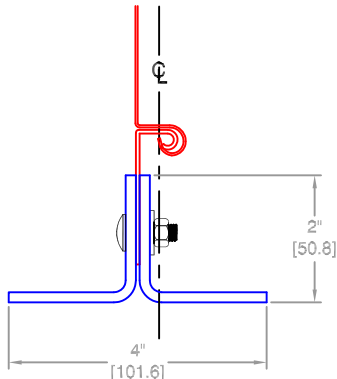

Roll-formed, Double Angle

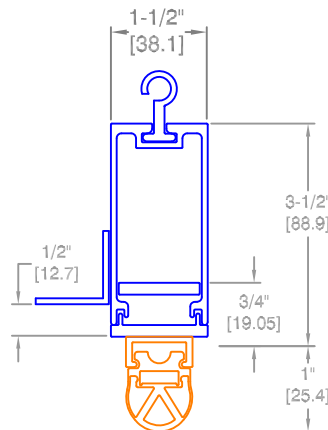


Aluminum extruded Tubular Bar  
with electrical sensing edge




Aluminum "F"  
Guide

BOTTOM BAR OPTIONS


GUIDE DETAIL

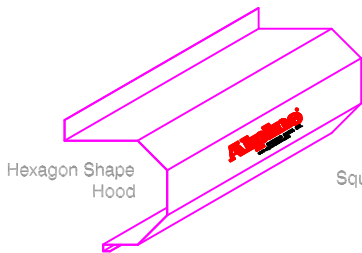

Hexagon Shape  
Hood



Square Shape  
Hood



Round Shape  
Hood

HOOD SHAPE OPTIONS

Distributed By:

Call your Alpine representative for additional options and safety products to help find the best Alpine door to suit your needs.

Manufactured by:

**Alpine**  
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007


NOTE: MAXIMUM PIPE  
DEFLECTION ON ANY SIZE  
DOOR IS .034



Page#:

Page 3

## Finding the minimum required operation for the size door you need.

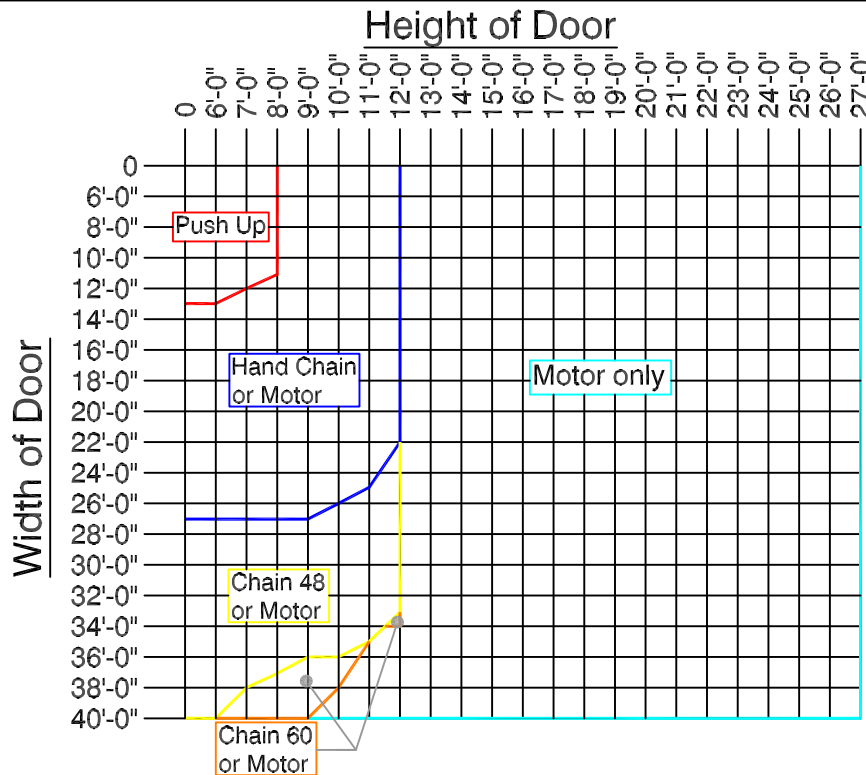


### Operator Legend

- Manual Push Up Operation
- Hand Chain Operation
- Hand Chain w/ Gear reduced 48
- Hand Chain w/ Gear reduced 60
- Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

## Finding the minimum required bracket size for the door you need.

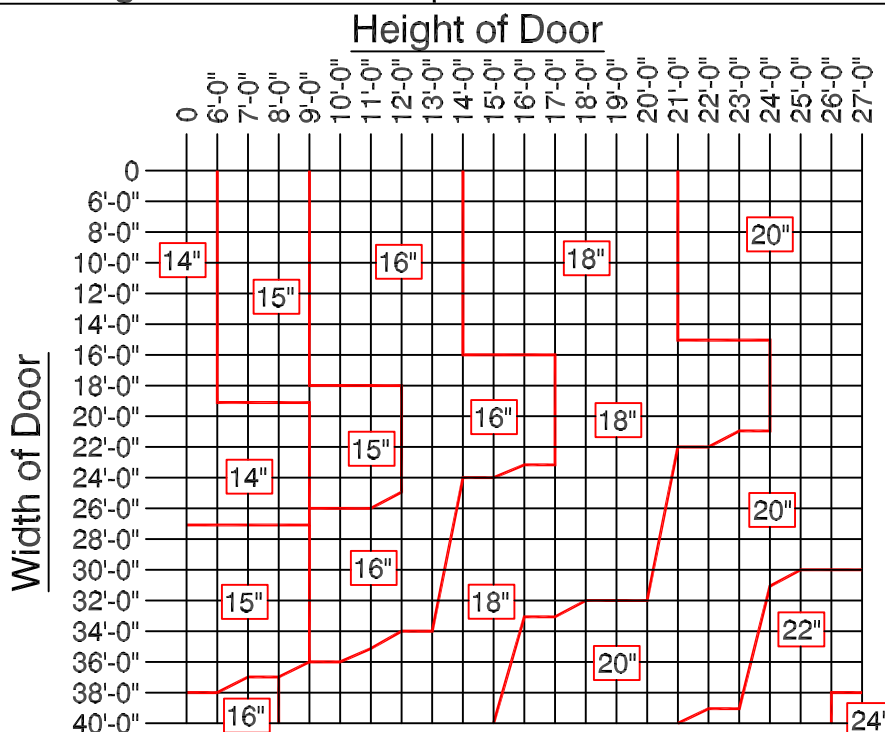

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

Manufactured by:

**Alpine**<sup>®</sup>  
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT DEC 2006