

HURRICANE PROTECTION DOOR

2 3/4" Flat Slat



REDI-STORM™

HURRICANE PROTECTION DEVICE
APPROVED MEANS OF EGRESS
APPROVAL# 95.1220.02


Manual Push-up Operated
Between Jamb Mounted

Page#:


Page 1

LG - Left Guide
RG - Right Guide
B - Bracket
GW - Guide Width
GD - Guide Depth

A - A

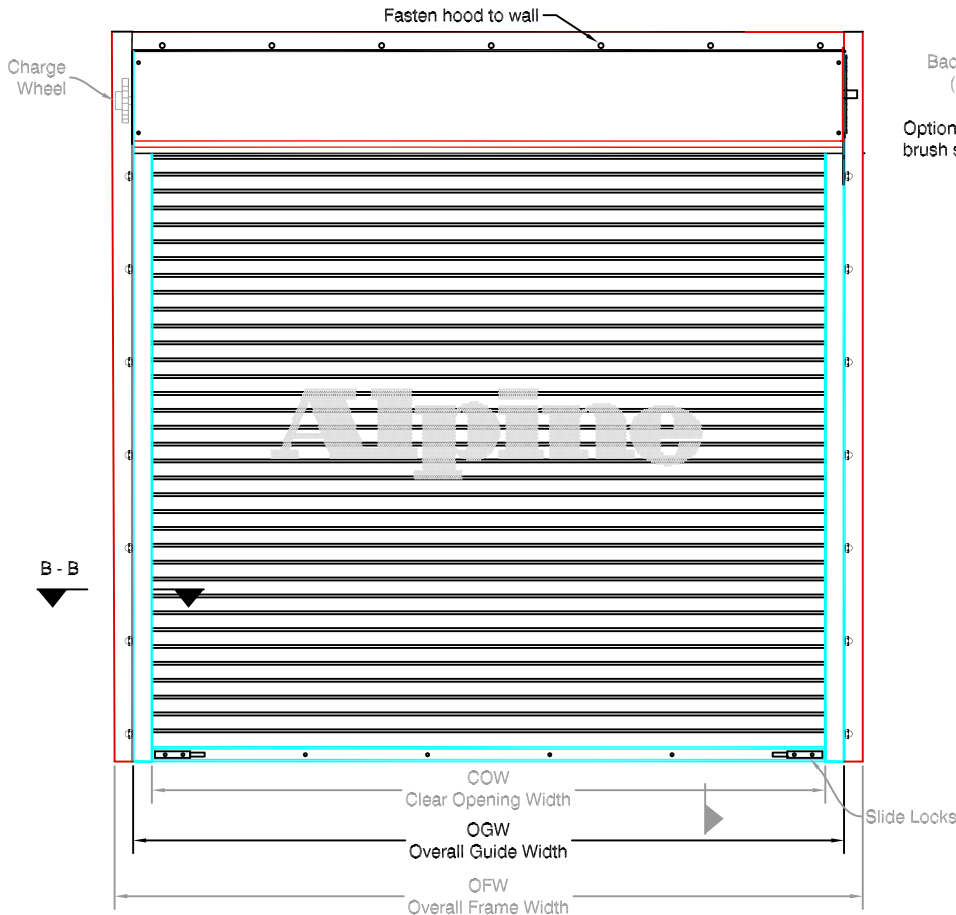


COIL SIDE ELEVATION

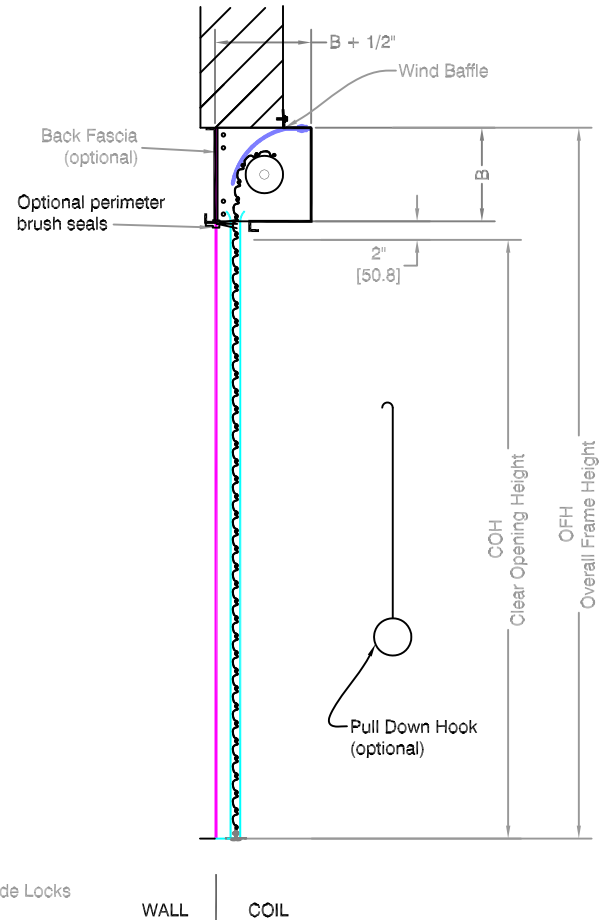


VERTICAL SECTION A - A

STEEL MOUNTED

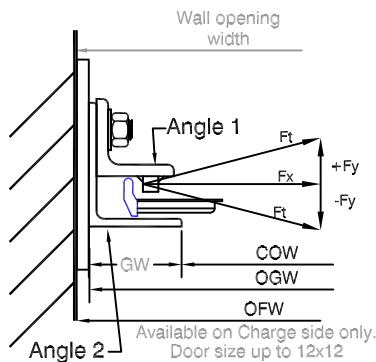

TUBE MOUNTED

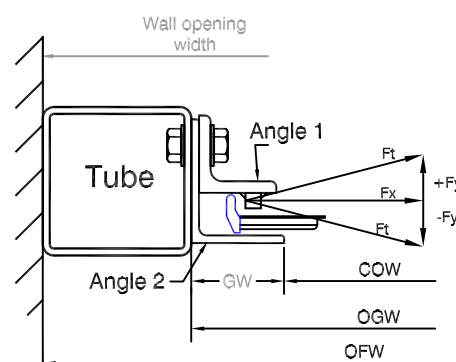

GUIDE SECTION B - B

Notes:

- See page 2 for more options.
- All metric conversions of dimensions are shown in brackets [].

SALES REP:

CUSTOMER:

JOB NAME:

NUMBER:

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007


REDI-STORM™

HURRICANE PROTECTION DEVICE
APPROVED MEANS OF EGRESS
APPROVAL# 95.1220.02

Manual Push-up Operated
Between Jamb Mounted

Page#:

Page 2

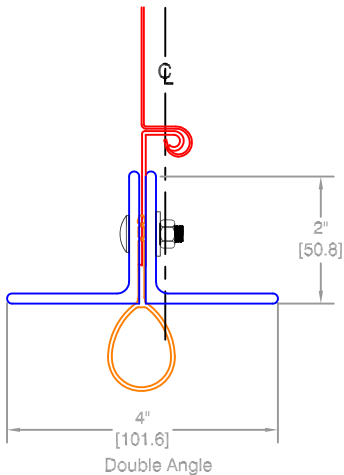


BOTTOM BAR DETAIL




Neoprene Astragal


OBSTACLE EDGES AVAILABLE




Hexagon Shape
Hood



Square Shape
Hood




Round Shape
Hood



Structural
Angles


HOOD SHAPES AVAILABLE FOR THIS DOOR

GUIDE STYLE


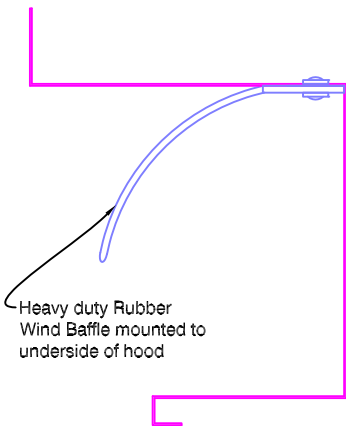


Heavy duty Rubber
Wind Baffle mounted to
underside of hood

WIND BAFFLE DETAIL

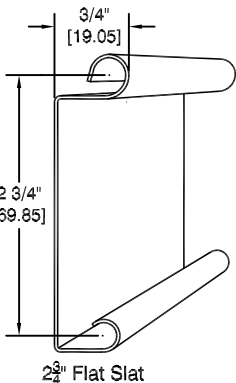

CURTAIN DETAIL

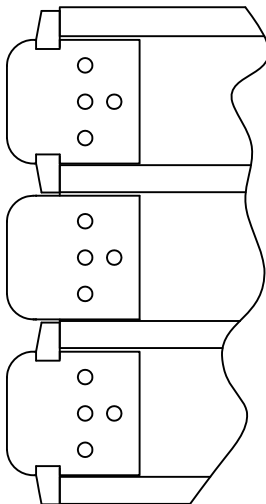

CONTINUOUS WINDLOCKS

Distributed By:

Call your Alpine representative for additional options and
safty products to help find the best Alpine door to suit your
needs.

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.
8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800
© COPYRIGHT MAY 2007

NOTE: MAXIMUM PIPE
DEFLECTION ON ANY SIZE
DOOR IS .034


REDI-STORM™

HURRICANE PROTECTION DEVICE
APPROVED MEANS OF EGRESS
APPROVAL# 95.1220.02

Page#:

Page 3

Finding the minimum required operation for the size door you need.

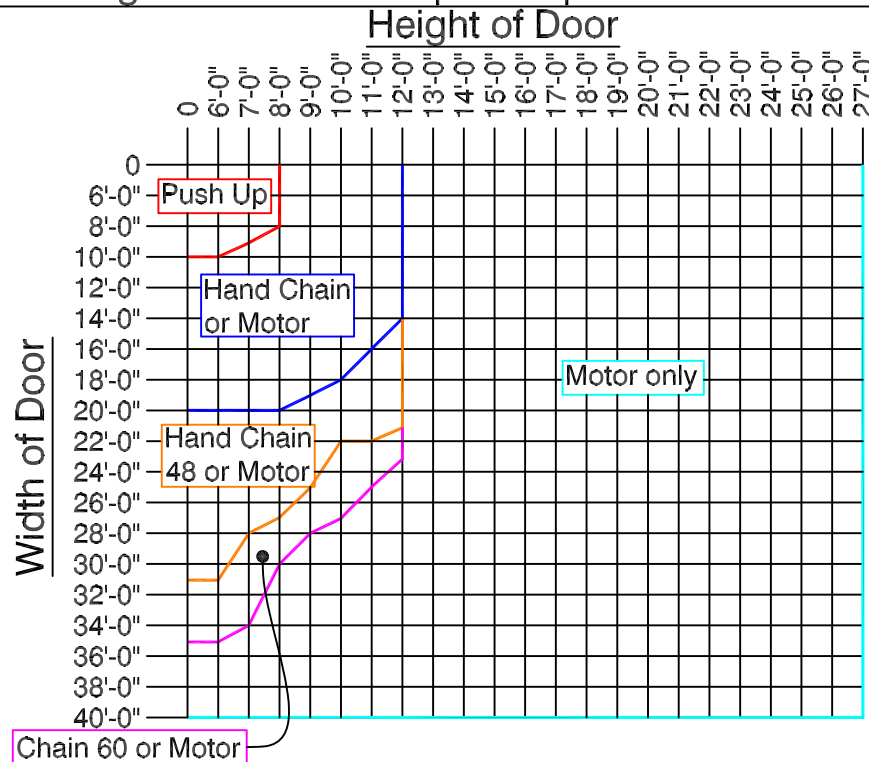


Operator Legend

- Manual Push Up Operation
- Hand Chain Operation
- Hand Chain with Gear Reduced 48
- Hand Chain with Gear Reduced 60
- Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Chain Operation. Any size door on that line or above that line may use a Hand Chain, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

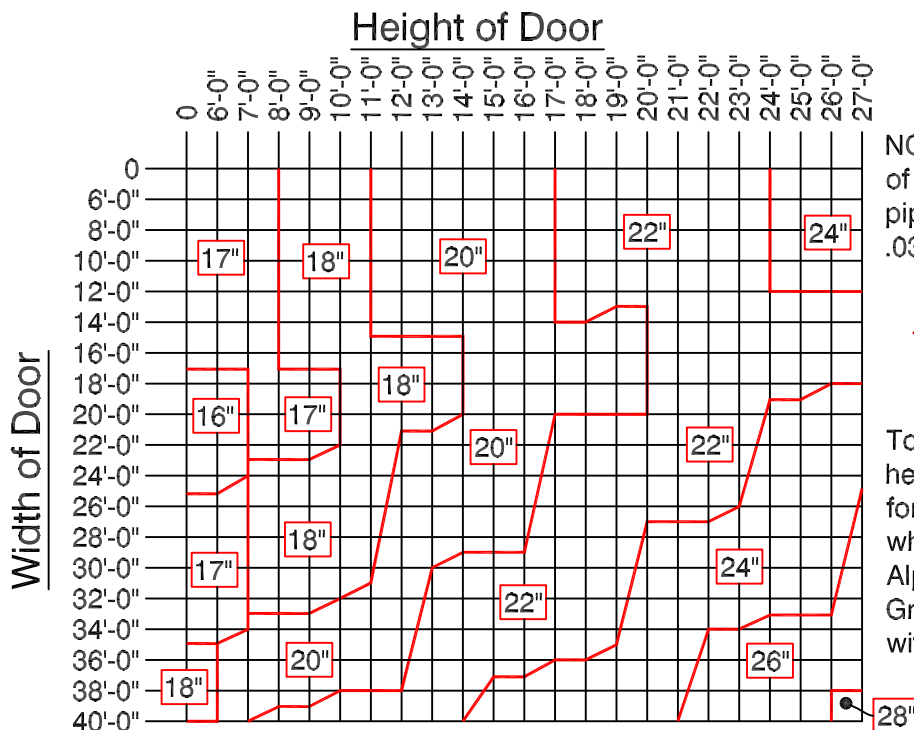

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800
© COPYRIGHT DEC 2006