





Hand Chain Operated
Face of Wall Mounted

Page#: Page 1

LG - Left Guide
RG - Right Guide
B - Bracket
GW - Guide Width
GD - Guide Depth

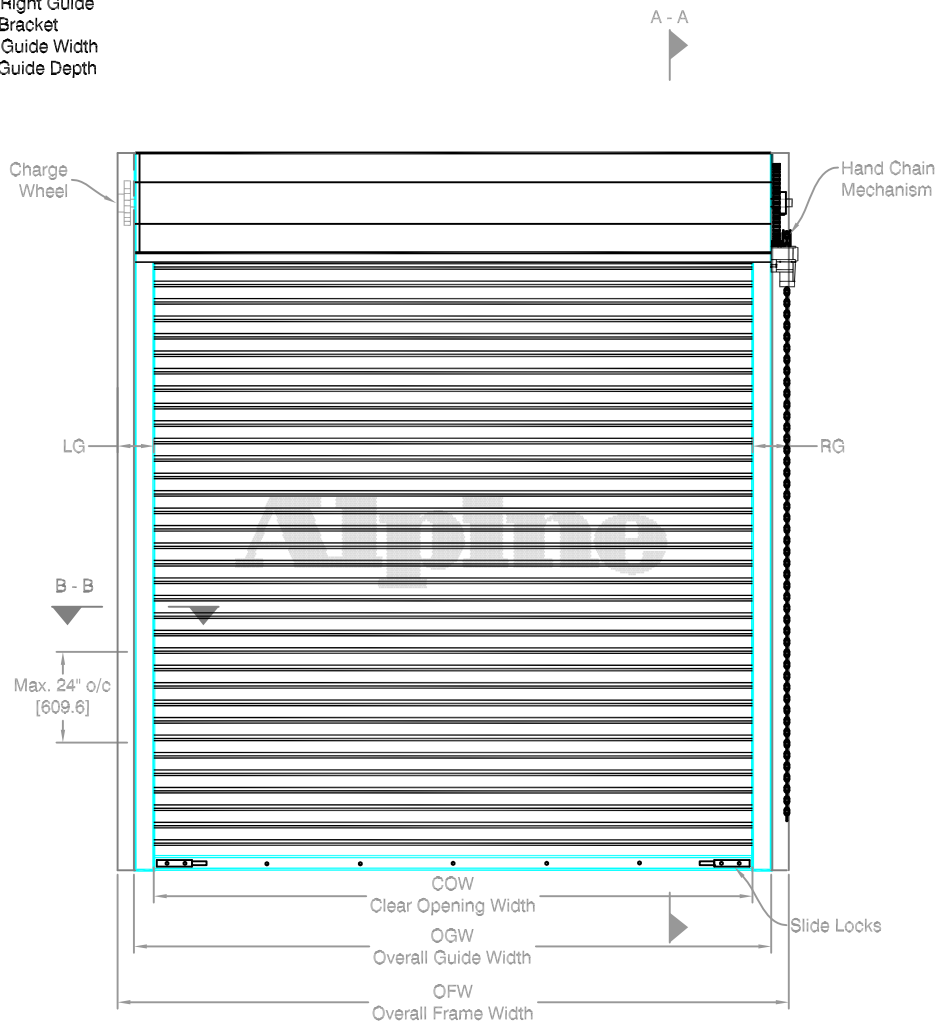


COIL SIDE ELEVATION

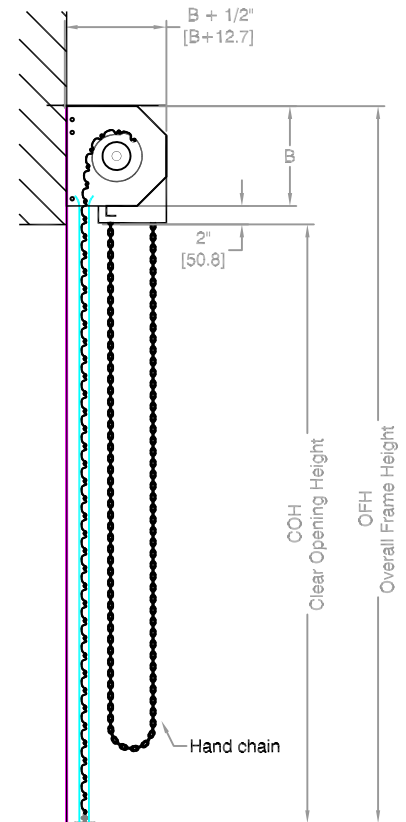


VERTICAL SECTION A - A

FACE MOUNTED TO MASONRY

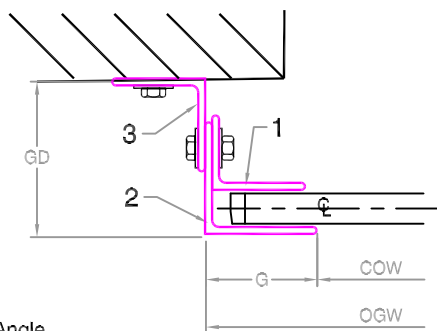


1- Inside Angle
2- Outside Angle
3- Wall Angle

FACE MOUNTED TO STEEL

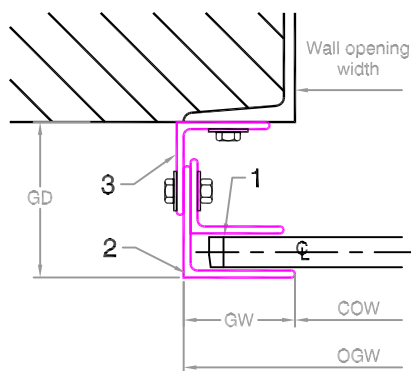

FACE MOUNTED TO TUBE

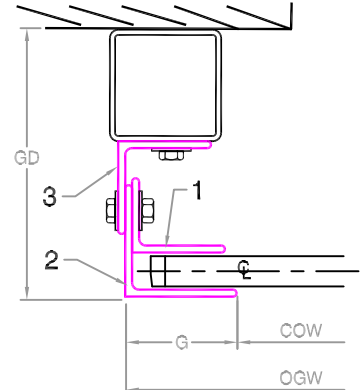

GUIDE SECTION B - B

Notes:

- See page 2 for more options.
- All metric conversions of dimensions are shown in brackets [].

SALES REP:

CUSTOMER:

JOB NAME:

NUMBER:

Manufactured by:




8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT JAN 2007





Hand Chain Operated
Face of Wall Mounted

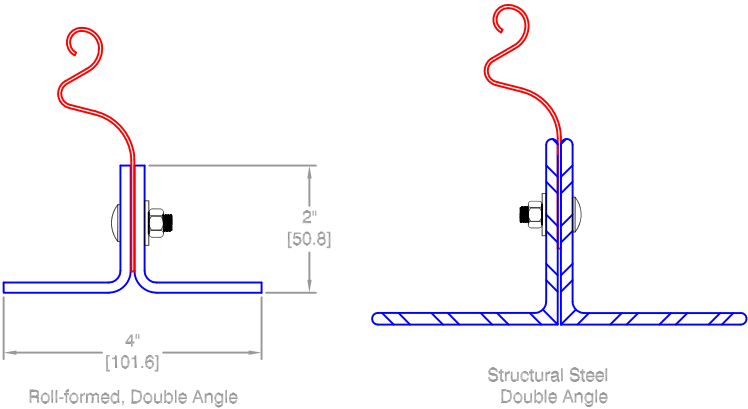

Neoprene Astragal


BOTTOM BAR OPTIONS

OBSTACLE EDGES AVAILABLE

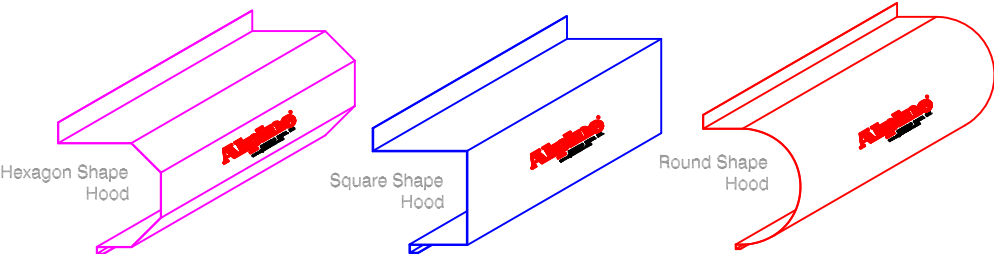

HOOD SHAPE OPTIONS

GUIDE OPTIONS

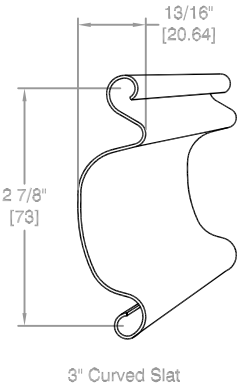

CURTAIN DETAIL

Distributed By:

Call your Alpine representative for additional options and safety products to help find the best Alpine door to suit your needs.

Manufactured by:

Alpine[®]
OVERHEAD DOORS, INC.
8 HULSE ROAD EAST SETAUKET, N.Y. 11733
TEL: (631)473-9300 FAX: (631)642-0800
© COPYRIGHT MAY 2007

NOTE: MAXIMUM PIPE
DEFLECTION ON ANY SIZE
DOOR IS .034



Page#:

Page 3

Finding the minimum required operation for the size door you need.

Height of Door

Operator Legend

- Manual Push Up Operation
- Hand Chain Operation
- Hand Chain w/ Gear reduced 48
- Hand Chain w/ Gear reduced 60
- Motor Operation Only

