


Maximum Security


Our maximum security doors boast the highest level of protection available, hands down. The impressive Riot-Tite™ model includes the Dual Riot-Lock™ system as standard, is impact resistant and has strong insulative properties. Ballistics resistance is available as well.

Features

- 2-3/4" and 3" in 24ga - 16ga, (varies by model)
- Galvanized Stainless Steel or Aluminum; primed tan, white or gray
- Industry leading dual layer interlocking slat system
- Contains polystyrene insulation at a min 15/16" thick
- High strength structural steel guides
- Riot-Lock™ advanced locking system provides security across the full door height, making it almost impossible to remove curtain from guides
- Tamper-proof hardware available
- Optional Smart Security System will close multiple doors upon alarm
- Fail-safe options allow closure during power failure
- Ballistic resistant configurations available
- Installed on the interior, exterior, face of wall or between jambs
- Powder coating in any color with optional **anti-graffiti properties**



Dual Riot-Lock™
Provides maximum security
across the full height of the door

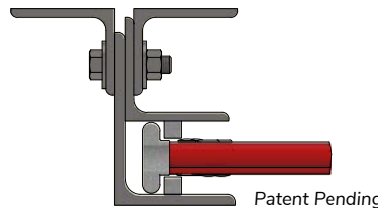

Heavy Duty Structural Guides
Made from high strength steel
Shown with Dual Riot-Lock™



Dual Layer Slats
Interlocking design provides
strong impact resistance

| | | |
|--|--|---|
| <p>IMB-V7™ 13/16" THICK INSULATED SLAT</p> | | <p>RIOT-TITE™ MAXIMUM SECURITY DOORS</p> |
| <p>7/8" Thick, 2-3/4" Slats</p> <ul style="list-style-type: none"> • 2-3/4" curved slats in 24/24ga minimum, with options for 22, 20, 18 and 16 • Strong and cost effective door with contoured slats • Heavy duty construction design • Manual push up, hand crank, hand chain or motor operated • Optional Riot-Lock™ system available • Installed on the interior, exterior, face of wall or between jambs | | <p>15/16" Thick, 3" Slats</p> <ul style="list-style-type: none"> • 20/20, 18/18, 16/16 gauges available • Slats available in galvanized steel & stainless steel • Impact resistant • R-value of 9.00/U-Factor of 111 with a thermal break on each slat • Metal on metal layered slat with insulative properties available • Perimeter weather seals available • Effective against wind loads of up to 250 PSF • Hand chain or motor operated • Dual Riot-Lock system standard |