

### Redi-Storm<sup>®</sup> Features

- Hurricane protection device
- Approved by Dade County, Florida and Florida Building Commission to withstand 187 mph winds
- Underwriters Laboratories Inc. reviewed for consumer confidence




**Alpine's Redi-Storm<sup>®</sup> Doors are widely used where there is a high level of storms, gusty wind conditions. Ideal for storm shelters, schools, office buildings, emergency call centers, police stations, post offices or anywhere that may be subject to intense storms. These doors protect both people and property from injury due to flying debris.**

### Functional Benefits

- Slat has been missile tested to ensure safety against flying debris
- Design pressure of +60 psf & -60 psf, 1.5 Safety factor, 90+/- psf
- All operating systems can be adapted to specific conditions such as; inclement weather, corrosive atmospheres, etc.
- Air infiltration – manufactured to meet 2015. IECC®, ASHRAE®90.1 and California's Title 24, tested independently to meet 0.3 CFM/FT
- Weather seals consist of a neoprene hood baffle, vinyl guide weather stripping and vinyl astragal on the bottom bar, with an option for 1½" perimeter brush seals

# REDI-STORM®

HURRICANE PROTECTION DEVICE  
APPROVED MEANS OF EGRESS

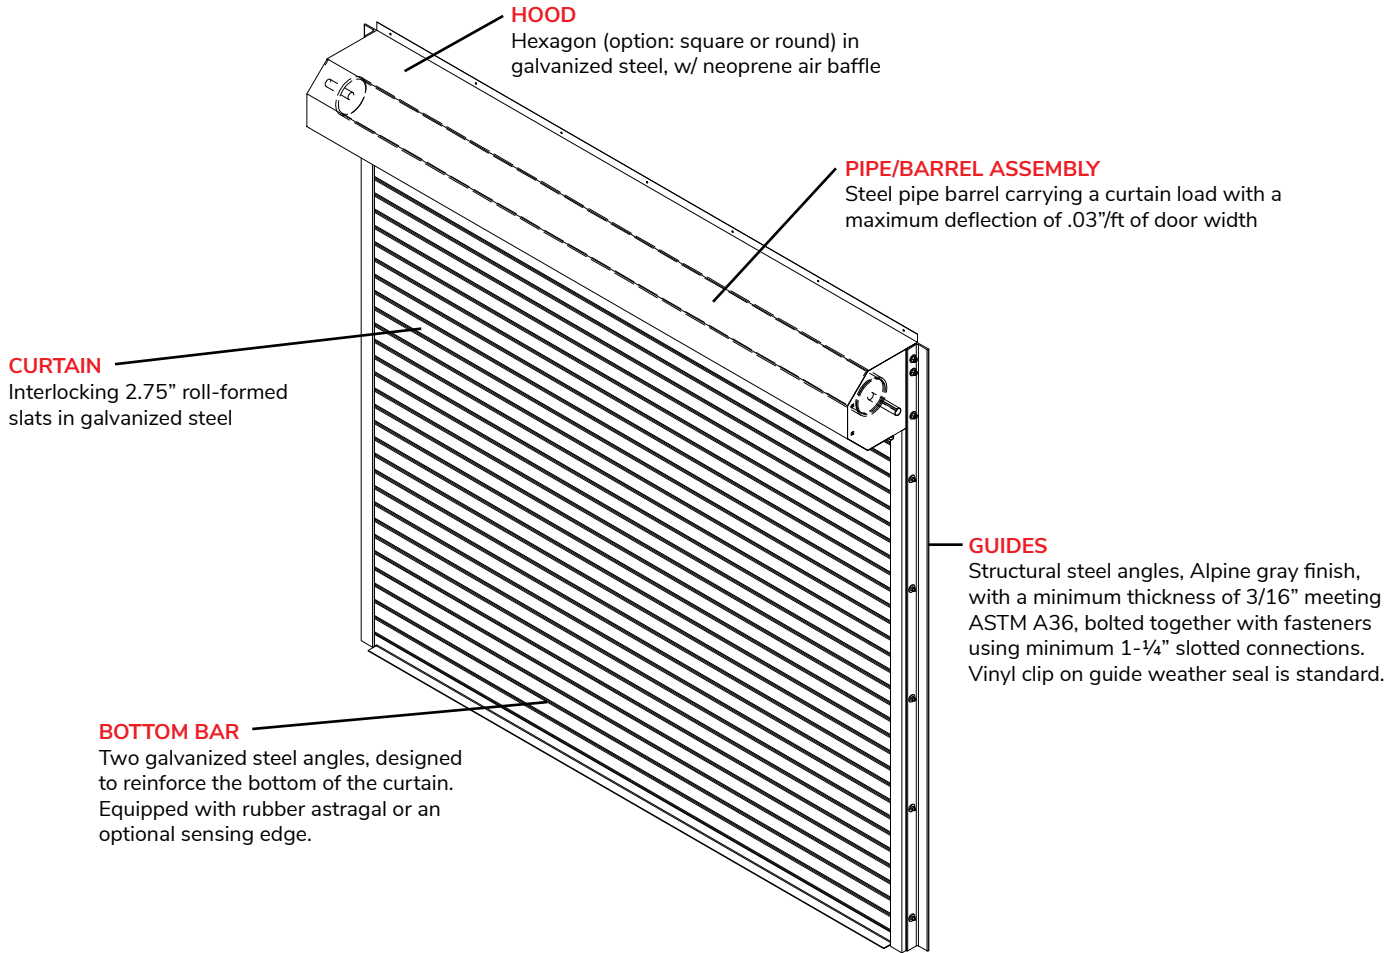

## Operational Requirements

- Choice of push-up, hand chain, removable awning type crank, or motor operation

## Optional Materials and Finishes

- Material Options: Stainless Steel
- Finish Options: Tan, White or Grey; or ExoShield™ Powder Coating.

## Product Selection Guide

More Economical



**REDI-STORM®**  
HURRICANE PROTECTION DEVICE  
APPROVED MEANS OF EGRESS

Better Performance

