

STEEL & PVC INSULATED DOOR

2 3/4" Flat Slat




insul-vapor®
STEEL & PVC INSULATED DOOR

Hand Crank Operated
Face of Wall Mounted


Page#:

Page 1




LG - Left Guide
RG - Right Guide
B - Bracket
GW - Guide Width
GD - Guide Depth

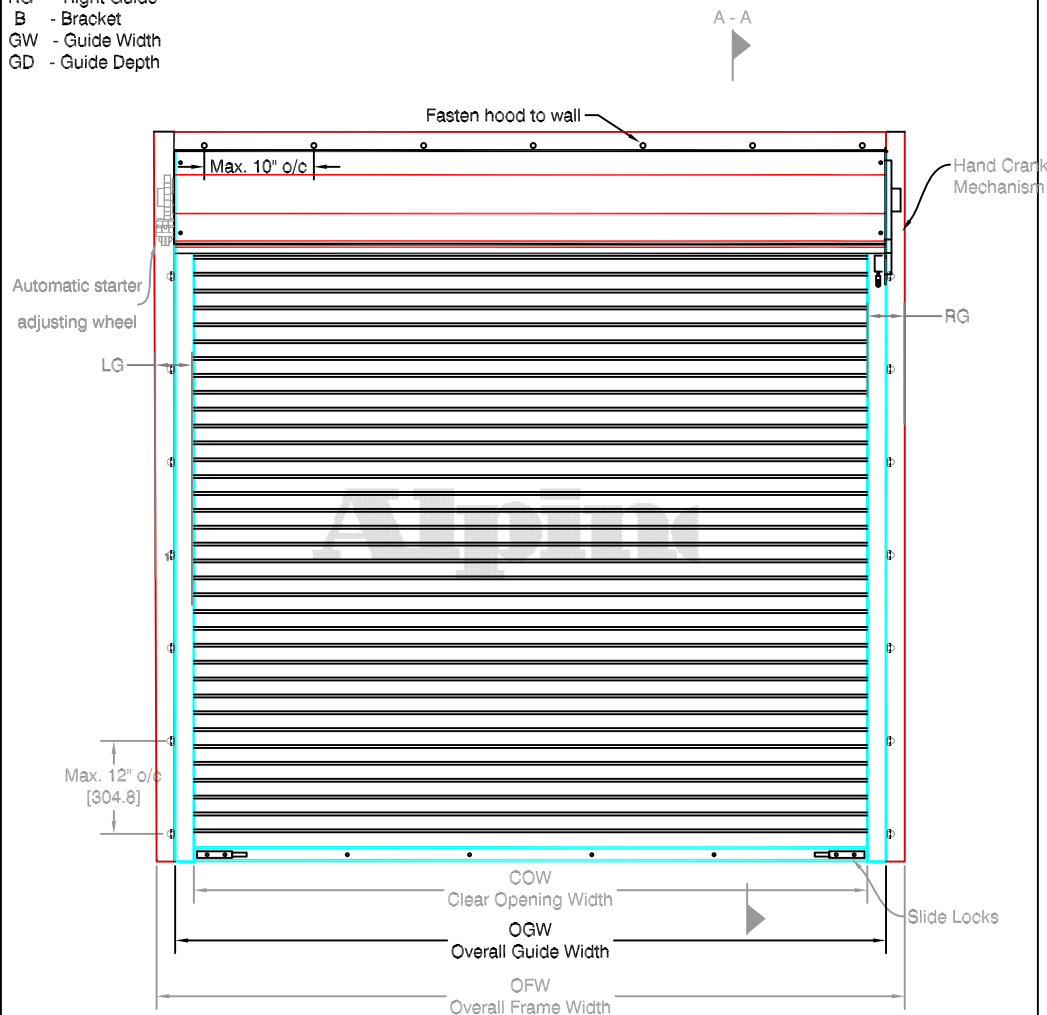

COIL SIDE ELEVATION

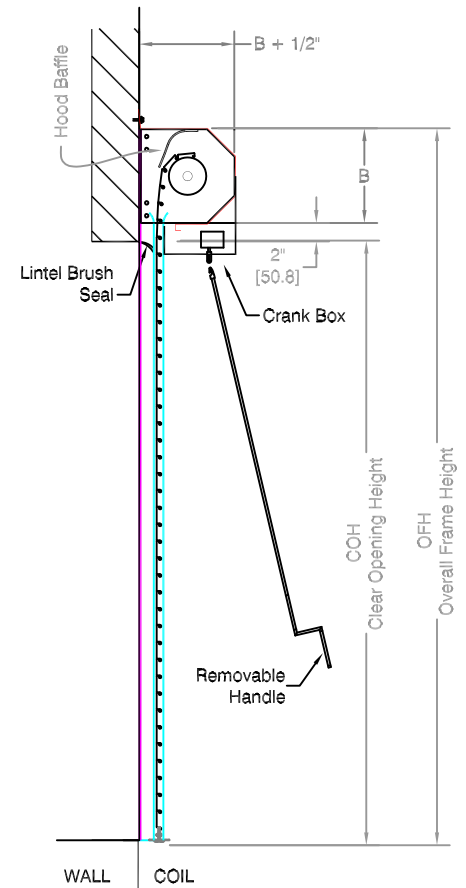

VERTICAL SECTION A - A

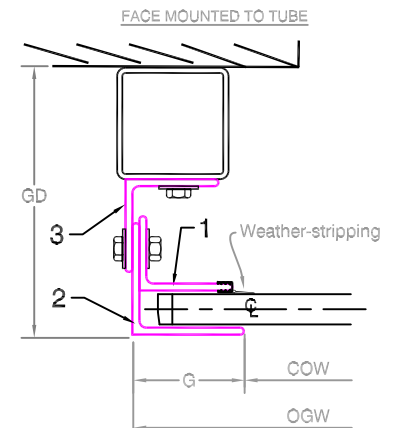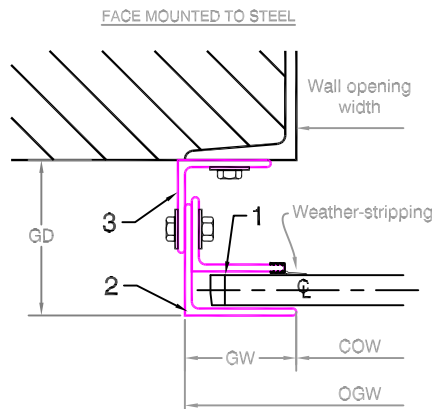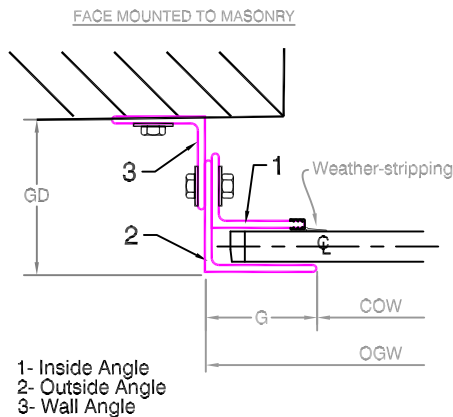

GUIDE SECTION B - B

Notes:

- See page 2 for more options.
- All metric conversions of dimensions are shown in brackets [].

SALES REP:

CUSTOMER:

JOB NAME:

NUMBER:

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007

STEEL & PVC INSULATED DOOR


2 3/4" Flat Slat

insul-vapor[®]
STEEL & PVC INSULATED DOOR


Hand Crank Operated
Face of Wall Mounted

Page#:


Page 2

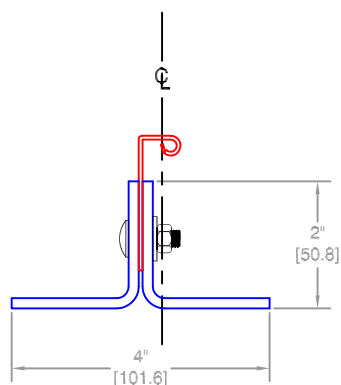

Roll-formed, Double Angle

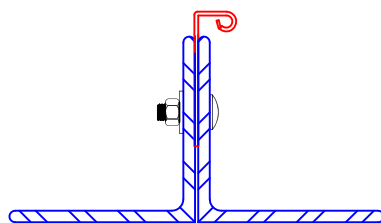


Structural Steel
Double Angle

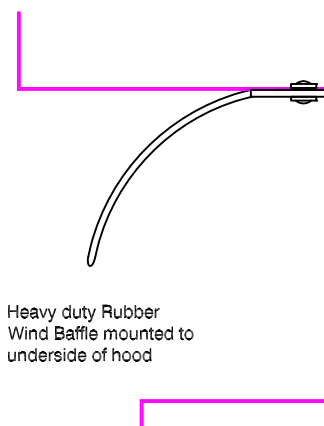


Heavy duty Rubber
Wind Baffle mounted to
underside of hood

BOTTOM BAR DETAIL


WIND BAFFLE DETAIL

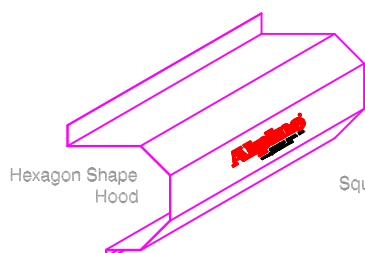


Hexagon Shape
Hood




Square Shape
Hood



Round Shape
Hood




Structural
Angles Guide




Roll-Formed
Angles Guide

HOOD SHAPES AVAILABLE FOR THIS DOOR

GUIDE OPTIONS



I.P.B.



Neoprene Astragal

CURTAIN DETAIL

OBSTACLE EDGES AVAILABLE

Distributed By:

Call your Alpine representative for additional options and safety products to help find the best Alpine door to suit your needs.

Manufactured by:

Alpine[®]
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT MAY 2007


NOTE: MAXIMUM PIPE
DEFLECTION ON ANY SIZE
DOOR IS .034

insul-vapor®
STEEL & PVC INSULATED DOOR

Page#:

Page 3

Finding the minimum required operation for the size door you need.

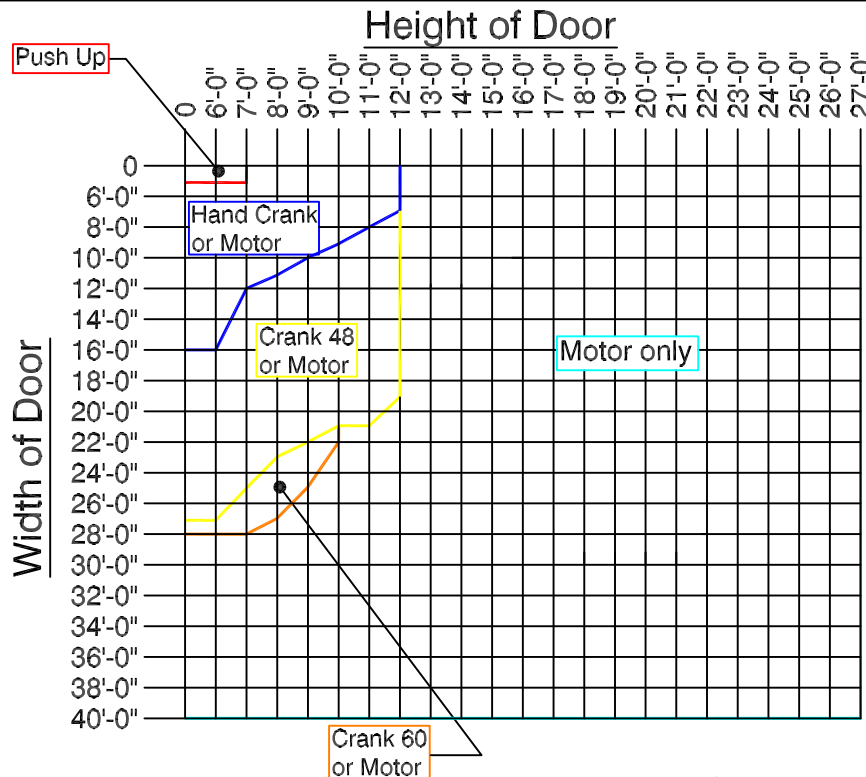


Operator Legend

- Manual Push Up Operation
- Hand Crank Operation
- Hand Crank w/ Gear reduced 48
- Hand Crank w/ Gear reduced 60
- Motor Operation Only

To use Chart: Find where your door width and height meet to find the minimum operation that may be used for that door size.

For example: The blue line indicates a Hand Crank Operation. Any size door on that line or above that line may use a Hand Crank, including the door sizes that fall into the Manual push up door. But, The Manual push up door may not be used for any door size below the line representing Push up operation. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Finding the minimum required bracket size for the door you need.

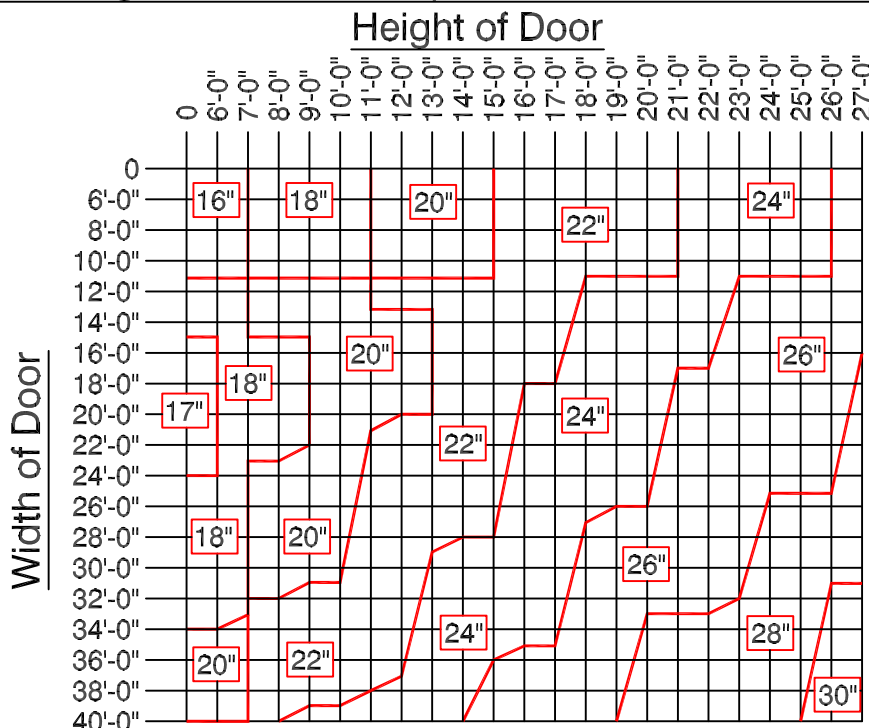

NOTE: Bracket sizes may vary based on gauge of curtain. Bracket size is directly related to the pipe low moment arm deflection (not more than .03 inches per foot).

To use Chart: Find where your door width and height meet to find the minimum bracket size for your door. For any door size larger than what is represented here please consult your Alpine Overhead Doors, Inc. Factory. This Graph is for reference only, subject to change without notice.

Distributed By:

Manufactured by:

Alpine®
OVERHEAD DOORS, INC.

8 HULSE ROAD EAST SETAUKET, N.Y. 11733

TEL: (631)473-9300 FAX: (631)642-0800

© COPYRIGHT DEC 2006